


MICA IP44 LED

520-0294


MICA IP44 SD WALL / CEILING LUMINAIRE made of metal, silver matt, satined PMMA opal diffuser satined, light output direct, with converter, max. 350mA, dimmable not dimmable, IP44



DRAWING

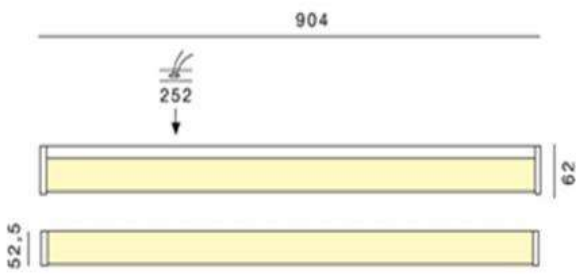

LIGHT DISTRIBUTION CURVE

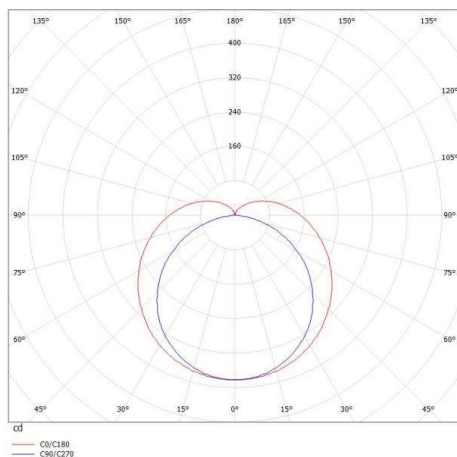

TECHNICAL DETAILS

System perform. [W]	21
Bulb type	LED
Luminous flux [lm]	1640
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60HZ
Material	metal
Length [mm]	904
Width [mm]	52,5
Height [mm]	62
Troat [mm]	52,5
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	1,60
Color lamp	silver matt
Glass color	satined
EAN-Number	9008905223310
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.