# LOG IN/OUT NG1

528-2410

LOG OUT UP/DOWN SYSTEM INSERT LIGHT INSERT made of metal, white, similar to RAL 9016, with converter, dimmability: not dimmable, through wiring 3x1,5mm², IP20

## DRAWING

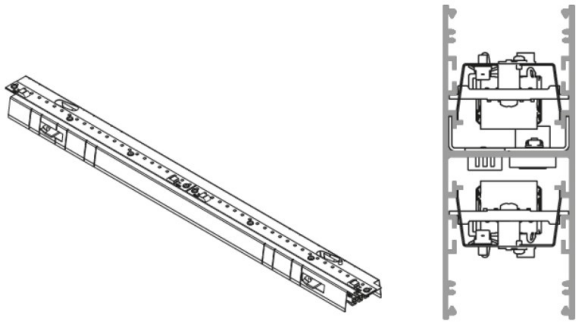

## TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 21 |
| Bulb type | LED |
| Luminous flux [lm] | 2740 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Voltage [V] | 220-240V 50/60Hz |
| Through wiring | 3x1,5mm² |
| Material | metal |
| | |
| Length [mm] | 857 |
| Width [mm] | 49 |
| Height [mm] | 38 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 0,94 |
| | |
| Colour lamp | white |
| RAL | 9016 |
| EAN-Number | 9008905214523 |
| Energy efficiency cl. | D |

## LIGHT DISTRIBUTION CURVE

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.