


## LITIN 2.0

540-0211014044040


LITIN 2 PD VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, grey, similar to RAL 9006, decor grey, satined PMMA opal diffuser beam 105°, light output direct, dimmability: not dimmable, cable black, adapter/ceiling base grey, pendant length 3000mm, IP20



## DRAWING

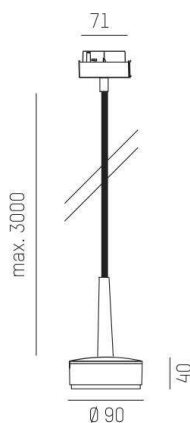

## LIGHT DISTRIBUTION CURVE

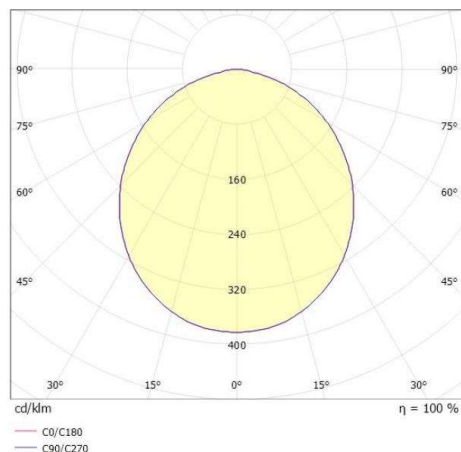

## TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	600
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Dimming	not dimmable
Light output	direct
Beam angle [°]	105°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	90
Height [mm]	114
Pendant length [mm]	3000
Diameter [mm]	90
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,75

Colour lamp	grey
RAL	9006
Colour adapter/ceiling base	grey
Colour decor	grey
Electric wire	black
EAN-Number	9010506933550
Lifetime [h]	30 000
Energy efficiency cl.	G



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.