


## LITIN 2.0

540-0412214064040


LITIN 2 PD SUSPENSION made of aluminium, grey, similar to RAL 9006, decor black, high quality plastic lens beam 24°, light output direct, dimmability: not dimmable, cable black, adapter/ceiling base grey, pendant length 3000mm, IP20



## DRAWING

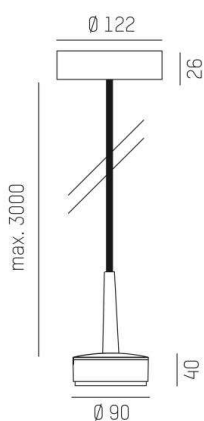

## LIGHT DISTRIBUTION CURVE

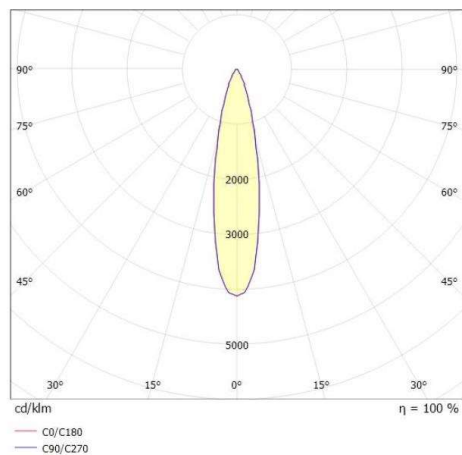

## TECHNICAL DETAILS

|                     |                           |
|---------------------|---------------------------|
| System perform. [W] | 10                        |
| Bulb type           | LED                       |
| Luminous flux [lm]  | 840                       |
| Colour temp. [K]    | 4000K                     |
| CRI                 | >90                       |
| Optics              | high quality plastic lens |
| Designer            | INHOUSE                   |
| Dimming             | not dimmable              |
| Light output        | direct                    |
| Beam angle [°]      | 24°                       |
| Voltage [V]         | 220-240V 50/60Hz          |
| Material            | aluminium                 |

|                     |                   |
|---------------------|-------------------|
| Height [mm]         | 114               |
| Pendant length [mm] | 3000              |
| Diameter [mm]       | 90                |
| IP protection class | IP20              |
| Voltage class       | protection cl. II |
| Net weight [kg]     | 1,20              |

|                             |               |
|-----------------------------|---------------|
| Colour lamp                 | grey          |
| RAL                         | 9006          |
| Colour adapter/ceiling base | grey          |
| Colour decor                | black         |
| Electric wire               | black         |
| EAN-Number                  | 9010506936209 |
| Lifetime [h]                | 30 000        |
| Energy efficiency cl.       | 6             |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.