


## LITIN 2.0

540-0511014056060


LITIN 2 VOLARE TRACK SPOTLIGHT WITH 2 PH VOLARE ADAPTER made of aluminium, black, similar to RAL 9005, decor white, satined PMMA opal diffuser beam 105°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, adapter/ceiling base black, IP20



## DRAWING

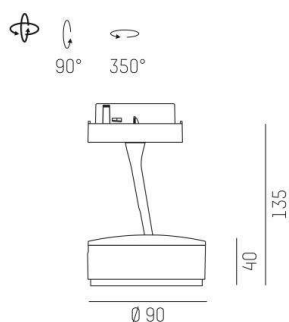

## LIGHT DISTRIBUTION CURVE

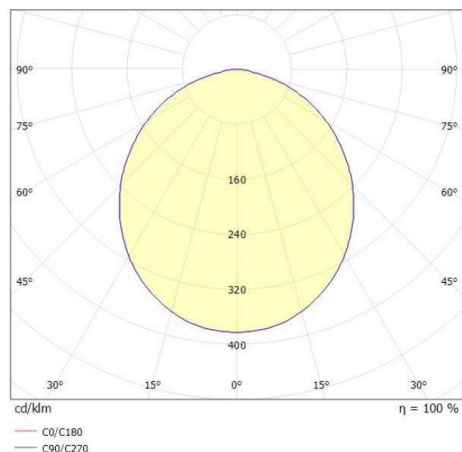

## TECHNICAL DETAILS

|                             |                    |
|-----------------------------|--------------------|
| System perform. [W]         | 10                 |
| Bulb type                   | LED                |
| Luminous flux [lm]          | 600                |
| Colour temp. [K]            | 4000K              |
| CRI                         | >90                |
| Optics                      | PMMA opal diffuser |
| Designer                    | INHOUSE            |
| Dimming                     | not dimmable       |
| Light output                | direct             |
| Beam angle [°]              | 105°               |
| Voltage [V]                 | 220-240V 50/60Hz   |
| Material                    | aluminium          |
| Length [mm]                 | 92,6               |
| Height [mm]                 | 140                |
| Diameter [mm]               | 90                 |
| IP protection class         | IP20               |
| Voltage class               | protection cl. II  |
| Net weight [kg]             | 0,77               |
| Colour lamp                 | black              |
| RAL                         | 9005               |
| Colour adapter/ceiling base | black              |
| Colour decor                | white              |
| EAN-Number                  | 9010506778601      |
| Lifetime [h]                | 30 000             |
| Energy efficiency cl.       | G                  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.