

LITIN 2.0

540-06122131b6060

LITIN 2 TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, decor copper, high quality plastic lens beam 24°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, adapter/ceiling base black, IP20




DRAWING



TECHNICAL DETAILS

|                             |                           |
|-----------------------------|---------------------------|
| System perform. [W]         | 10                        |
| Bulb type                   | LED                       |
| Luminous flux [lm]          | 740                       |
| Colour temp. [K]            | 2700K                     |
| CRI                         | >90                       |
| Optics                      | high quality plastic lens |
| Designer                    | INHOUSE                   |
| Dimming                     | not dimmable              |
| Light output                | direct                    |
| Beam angle [°]              | 24°                       |
| Voltage [V]                 | 220-240V 50/60Hz          |
| Material                    | aluminium                 |
| Length [mm]                 | 101,7                     |
| Height [mm]                 | 135                       |
| Diameter [mm]               | 90                        |
| IP protection class         | IP20                      |
| Voltage class               | protection cl. II         |
| Net weight [kg]             | 1,22                      |
| Colour lamp                 | black                     |
| RAL                         | 9005                      |
| Colour adapter/ceiling base | black                     |
| Colour decor                | copper                    |
| EAN-Number                  | 9010506780376             |
| Lifetime [h]                | 30 000                    |
| Energy efficiency cl.       | G                         |

LIGHT DISTRIBUTION CURVE

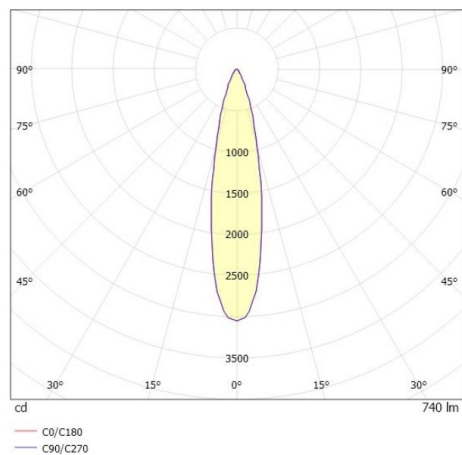

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.