


LITIN 2.0

540-0612219045050


LITIN 2 TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9016, decor grey, high quality plastic lens beam 24°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, adapter/ceiling base white, IP20



DRAWING

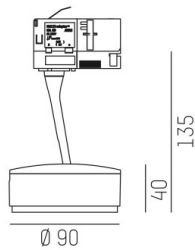

LIGHT DISTRIBUTION CURVE

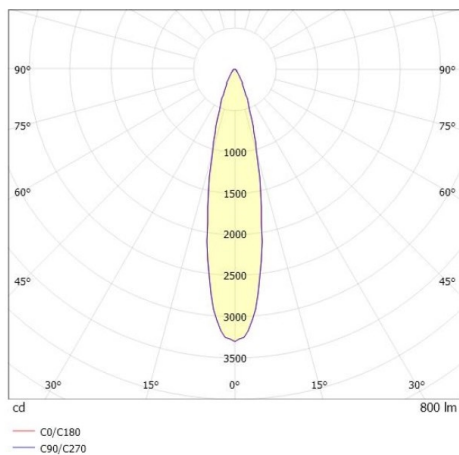

TECHNICAL DETAILS

| | |
|-----------------------------|---------------------------|
| System perform. [W] | 10 |
| Bulb type | LED |
| Luminous flux [lm] | 800 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | high quality plastic lens |
| Designer | INHOUSE |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 24° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 101,7 |
| Height [mm] | 135 |
| Diameter [mm] | 90 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 1,22 |
| Colour lamp | white |
| RAL | 9016 |
| Colour adapter/ceiling base | white |
| Colour decor | grey |
| EAN-Number | 9010506979992 |
| Lifetime [h] | 30 000 |
| Energy efficiency cl. | G |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.