




## ZH00M

56-185026ng1

ZH00M WR RECESSED WALL LUMINAIRE made of aluminium, natural, high quality glass lens light output direct, without converter, max. 500mA, IP20

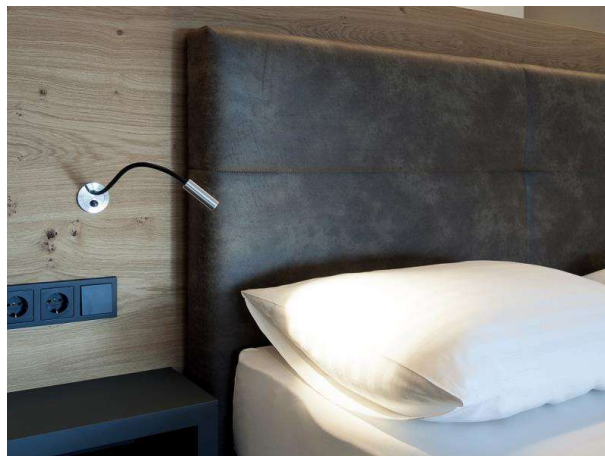

## DRAWING

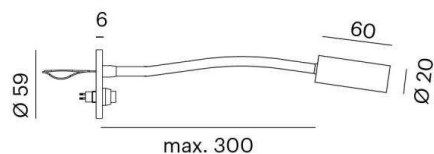

## LIGHT DISTRIBUTION CURVE

## TECHNICAL DETAILS

|                       |                         |
|-----------------------|-------------------------|
| System perform. [W]   | 2                       |
| Bulb type             | LED 2W                  |
| Luminous flux [lm]    | 153                     |
| Current sec. [mA]     | 500                     |
| Colour temp. [K]      | 3000K                   |
| CRI                   | >90                     |
| Optics                | high quality glass lens |
| Converter             | without converter       |
| Light output          | direct                  |
| Material              | aluminium               |
| Length [mm]           | 300                     |
| Width [mm]            | 5,5                     |
| Diameter [mm]         | 59                      |
| Troat [mm]            | 300                     |
| Ceiling cutout [mm]   | 38                      |
| Recess depth [mm]     | 15                      |
| IP protection class   | IP20                    |
| Voltage class         | protection cl. III      |
| Net weight [kg]       | 0,17                    |
| Colour lamp           | natural                 |
| EAN-Number            | 9010506782691           |
| Lifetime [h]          | 50 000                  |
| Energy efficiency cl. | E                       |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.