



ZH00M

56-185029ng1

ZH00M WR RECESSED WALL LUMINAIRE made of aluminium, white matt, high quality glass lens light output direct, without converter, max. 500mA, IP20

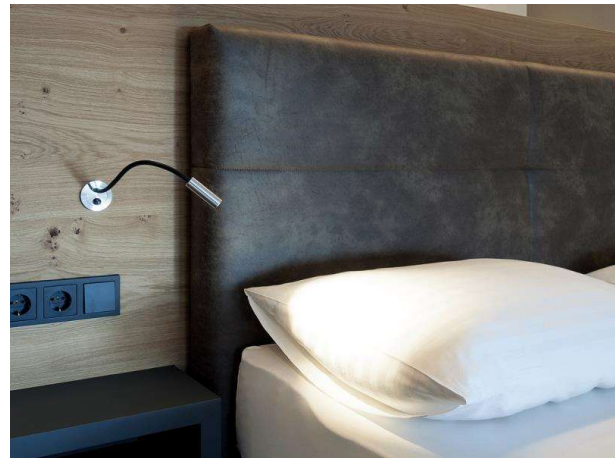

DRAWING



Ø 38 mm  
ET 15 mm



LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED 2W
Luminous flux [lm]	153
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Optics	high quality glass lens
Converter	without converter
Light output	direct
Material	aluminium
Length [mm]	300
Width [mm]	5,5
Diameter [mm]	59
Troat [mm]	300
Ceiling cutout [mm]	38
Recess depth [mm]	15
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,17
Colour lamp	white matt
EAN-Number	9010506782714
Lifetime [h]	50 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.