MOTUS

56-53012ng2

MOTUS LONG WR RECESSED WALL LUMINAIRE made of aluminium, satined chrome,high quality glass lens beam 60°, light output direct, tilting 360°, without converter, max. 500mA, dimmability: see converter, IP20

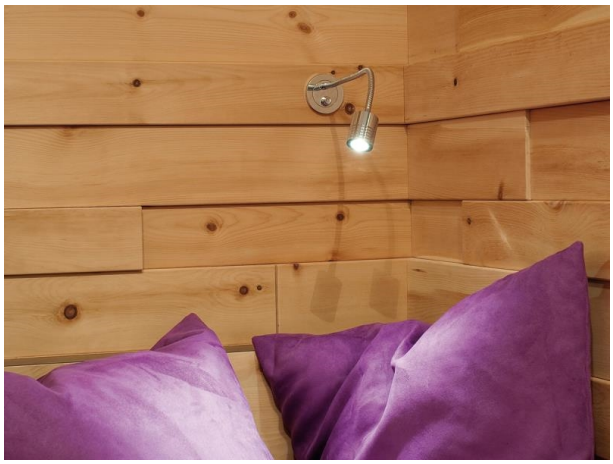

DRAWING

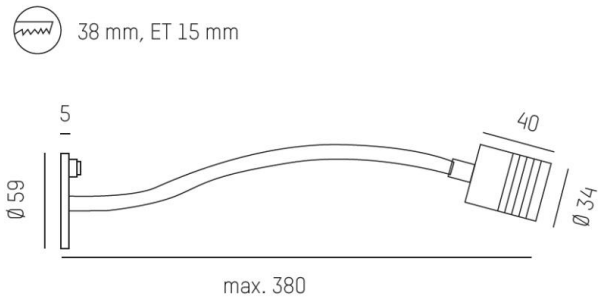

TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED 2W
Luminous flux [lm]	160
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Optics	high quality glass lens
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	60°
Material	aluminium
Length [mm]	380
Diameter [mm]	59
Ceiling cutout [mm]	38
Recess depth [mm]	15
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,25
Colour lamp	satined chrome
EAN-Number	9010506372397
Lifetime [h]	50 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

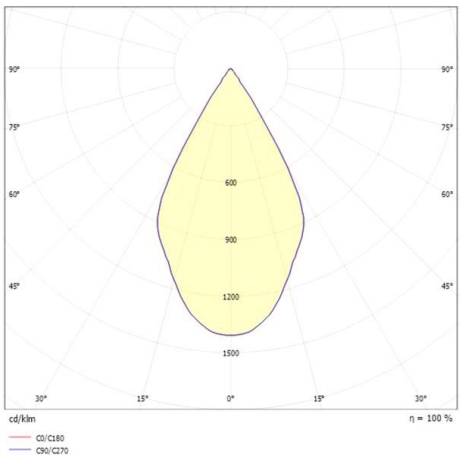

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.