



## COMA

56-60062ang2

COMA WR RECESSED SPOTLIGHT made of aluminium, satined chrome, polycarbonate cover light output direct, without converter, max. 500mA, IP54

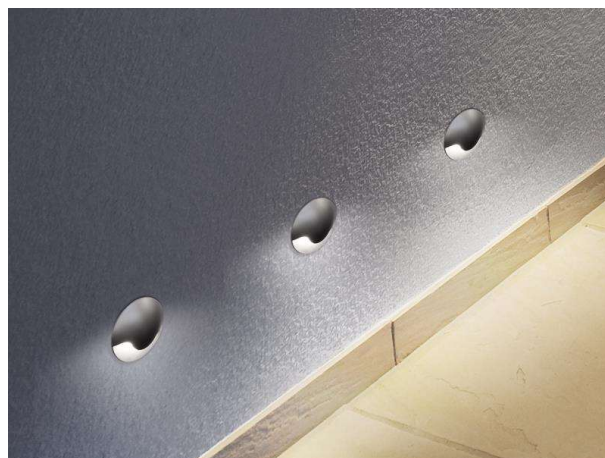

## DRAWING

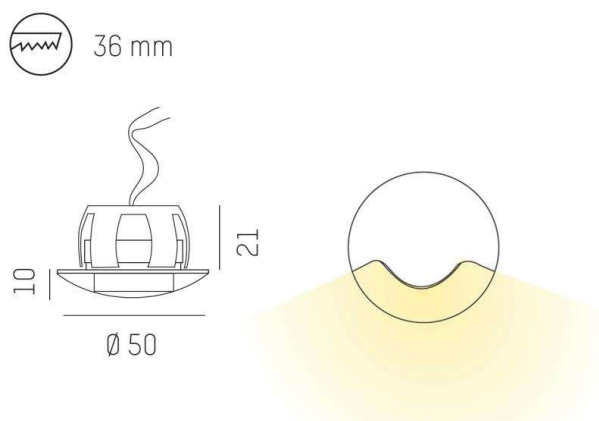

## LIGHT DISTRIBUTION CURVE

## TECHNICAL DETAILS

Bulb type	LED 2W
Luminous flux [lm]	49
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Optics	polycarbonate cover
Designer	OZ Lighting
Converter	without converter
Light output	direct
Material	aluminium
Height [mm]	10
Diameter [mm]	50
Ceiling cutout [mm]	36
Recess depth [mm]	21
IP protection class	IP54
Voltage class	protection cl. III
Net weight [kg]	0,06
Color lamp	satined chrome
Lifetime [h]	50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.