


MINIPARIO

57-gh1129lvft400en05

MINIPARIO SURFACE MOUNTED SPOTLIGHT anthrazite, transparent glass beam 58°, swiveling 350, tilting 90, with converter, dimmability: not dimmable, IP67




DRAWING

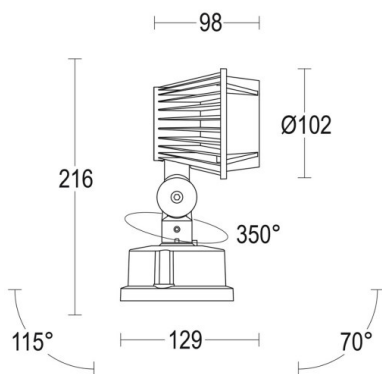

TECHNICAL DETAILS

System perform. [W]	8
Bulb type	LED
Luminous flux [lm]	983
Colour temp. [K]	4000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Beam angle [°]	58°
Voltage [V]	220-240V 50/60Hz
Length [mm]	129
Height [mm]	216
Diameter [mm]	102
IP protection class	IP67
Voltage class	protection cl. I
Shock resistance	IK07
Net weight [kg]	0,83
Colour lamp	anthrazite
Lifetime [h]	100 000 L80 B10
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

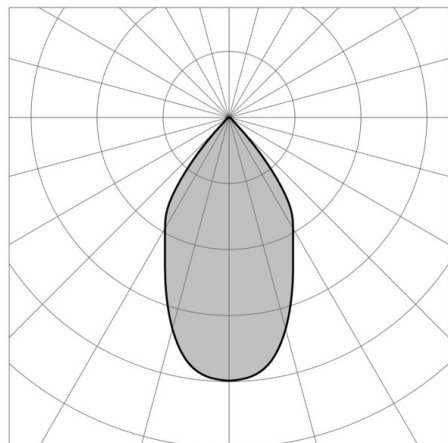

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.