



VERSO

57-gh1136bgxp300en05

VERSO FLAT SQUARE SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, microprismatic PMMA cover for perfect anti-glare beam asymmetric, light output direct, with converter, dimmability: not dimmable, IP65

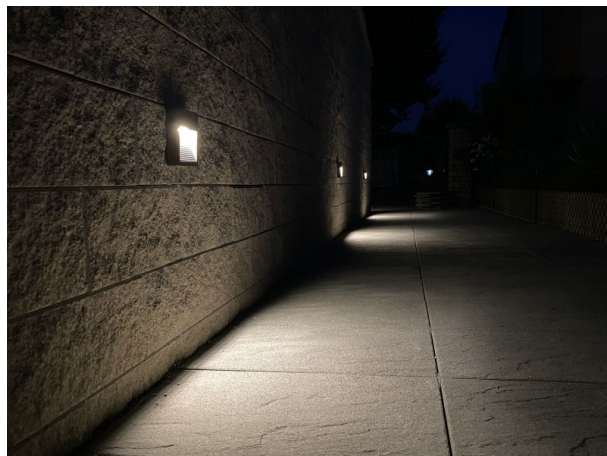


DRAWING

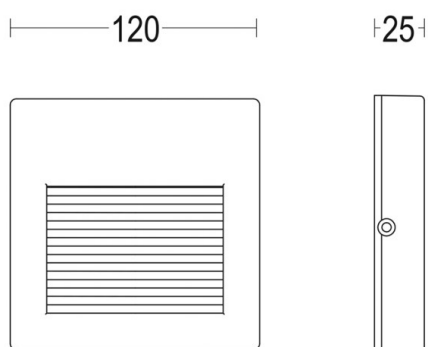

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	LED
Luminous flux [lm]	86
Colour temp. [K]	3000K
CRI	>90
Optics	microprismatic cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	120
Width [mm]	120
Height [mm]	25
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK09
Net weight [kg]	0,49
Colour lamp	anthrazite
Lifetime [h]	60 000 L80 B10
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

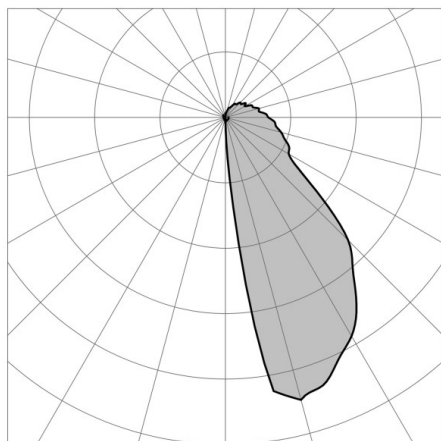

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.