



VERSO

57-gh1165bgxp300en19

VERSO FLAT SQUARE RECESSED WALL LUMINAIRE made of aluminium, light grey, microprismatic PMMA cover for perfect anti-glare beam asymmetric, light output direct, with converter, dimmability: not dimmable, IP65

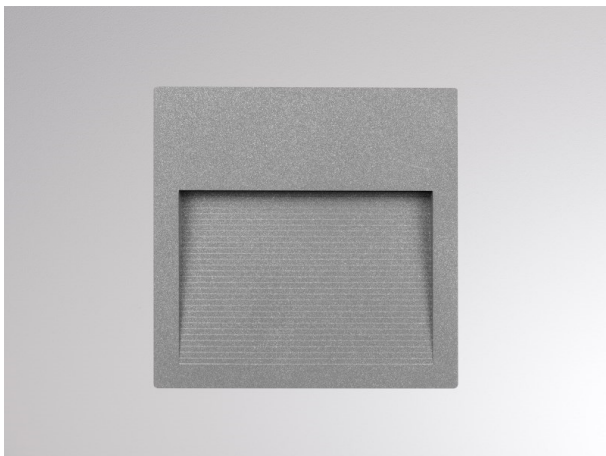


DRAWING

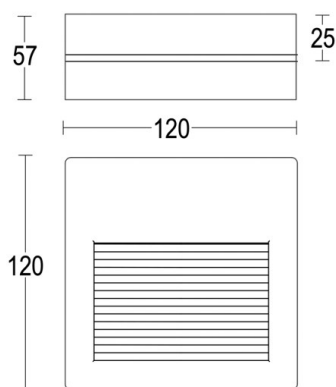

TECHNICAL DETAILS

| | |
|-----------------------|----------------------|
| System perform. [W] | 4 |
| Bulb type | LED |
| Luminous flux [lm] | 86 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | microprismatic cover |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | asymmetrisch |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 120 |
| Width [mm] | 120 |
| Recess depth [mm] | 57 |
| IP protection class | IP65 |
| Voltage class | protection cl. I |
| Shock resistance | IK09 |
| Net weight [kg] | 0,70 |
| Colour lamp | light grey |
| Lifetime [h] | 60 000 L80 B10 |
| Energy efficiency cl. | E |

LIGHT DISTRIBUTION CURVE

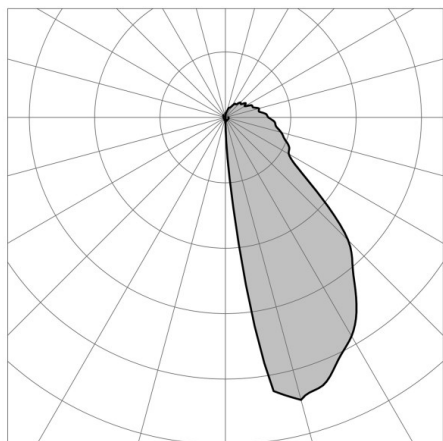

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.