


FARO FLAT

57-gh1397faft300en05

FARO FLAT 125 SURFACE MOUNTED SPOTLIGHT made of aluminium, anthrazite, transparent glass beam 42°, tilting 40° - 90°, with converter, dimmability: not dimmable, IP65




DRAWING



TECHNICAL DETAILS

System perform. [W]	18
Bulb type	LED
Luminous flux [lm]	1001
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Beam angle [°]	42°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	125
Width [mm]	125
Height [mm]	108
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK07
Net weight [kg]	0,92
Colour lamp	anthrazite
Lifetime [h]	50 000 L70 B50
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

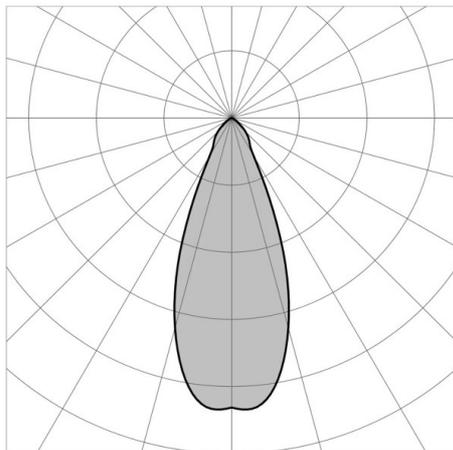

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.