


## TONDO

57-gh1457lvxt300en05

TONDO 175 BOLLARD made of die-cast aluminium, anthrazite, transparent glass beam 360°, light output direct, with converter, dimmability: not dimmable, IP65 Betriebstemperatur (-20° bis +35°)




## DRAWING

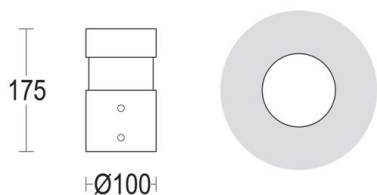

## TECHNICAL DETAILS

System perform. [W]	9
Bulb type	LED
Luminous flux [lm]	166
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	360°
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Height [mm]	175
Diameter [mm]	100
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK09
Net weight [kg]	1,93
Colour lamp	anthrazite
Lifetime [h]	50 000 L70 B10
Energy efficiency cl.	G

## LIGHT DISTRIBUTION CURVE

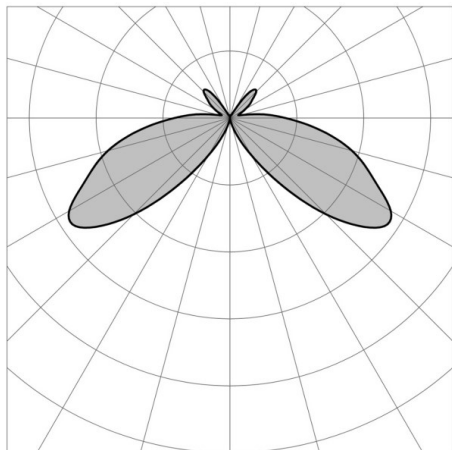

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.