



## PASSO

## 57-gh1604baat300env1


PASSO RECESSED SPOTLIGHT made of aluminium, white, transparent glass beam asymmetric, with converter, max. 350mA, dimmability: not dimmable, IP65

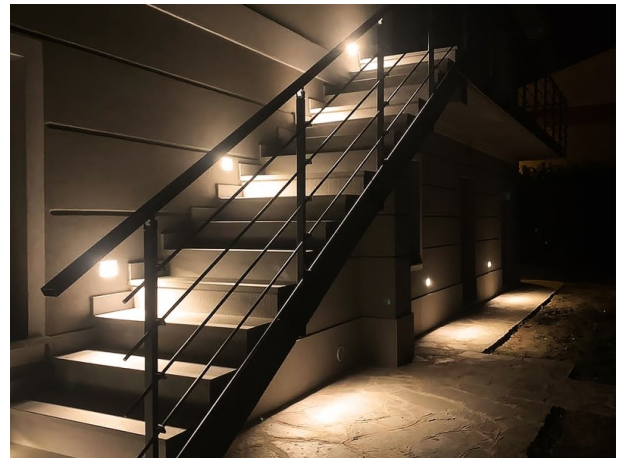

## DRAWING

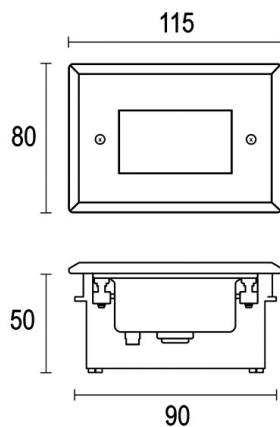

## LIGHT DISTRIBUTION CURVE

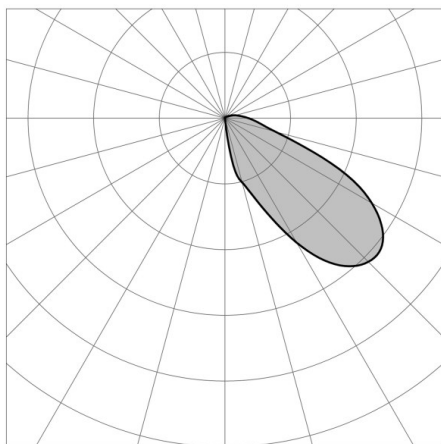

## TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED
Luminous flux [lm]	197
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Beam angle [°]	asymmetrisch
Voltage [V]	110-240V 50/60Hz
Material	aluminium
Length [mm]	115
Width [mm]	80
Height [mm]	5
Recess depth [mm]	55
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK09
Net weight [kg]	0,36
Colour lamp	white
Lifetime [h]	60 000 L80 B10
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.