



NEO

57-gh6616ahft300en15

NEO RECESSED FLOOR LAMP stainless steel, transparent glass beam 58°, with converter, max. 200mA, dimmability: not dimmable, IP68

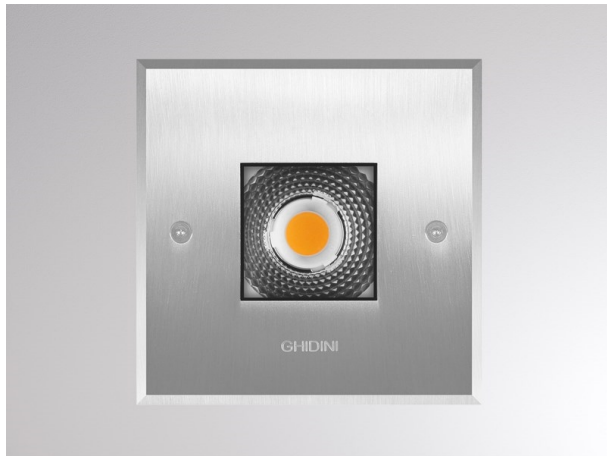


DRAWING

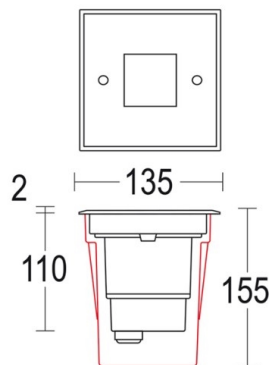

TECHNICAL DETAILS

System perform. [W]	8
Bulb type	LED
Luminous flux [lm]	914
Current sec. [mA]	200
Colour temp. [K]	3000K
CRI	>90
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Beam angle [°]	58°
Voltage [V]	220-240V 50/60Hz
Length [mm]	135
Width [mm]	135
Recess depth [mm]	110
IP protection class	IP68
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	0,93
Colour lamp	stainless steel
Lifetime [h]	100 000 L80 B10
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

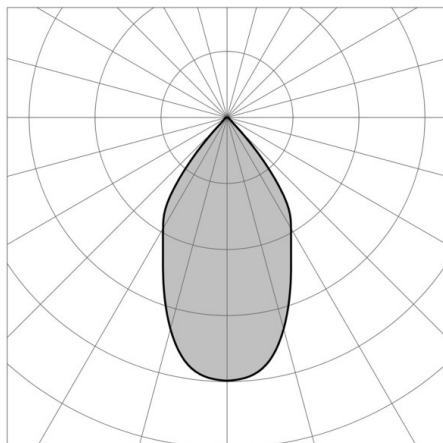

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.