


**PARI LED**

**576-0395**

PARI SD WALL / CEILING LUMINAIRE made of die-cast aluminium, white, similar to RAL 9016, satined PMMA diffuser cubic for homogeneous illumination light output direct, with converter, dimmable not dimmable, IP43



**DRAWING**

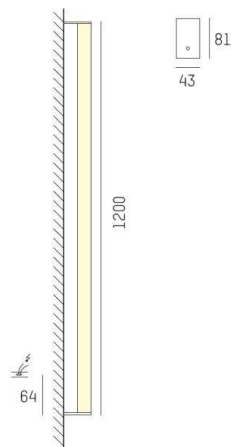


**TECHNICAL DETAILS**

System perform. [W]	28
Bulb type	LED
Luminous flux [lm]	2920
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser cubic
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V AC/DC
Material	die-cast aluminium

Length [mm]	1200
Width [mm]	43
Height [mm]	81
IP protection class	IP43
Voltage class	protection cl. I
Net weight [kg]	1,95

Color lamp	white
RAL	9016
EAN-Number	9008905221897
Lifetime [h]	L80 B10 50 000

**LIGHT DISTRIBUTION CURVE**

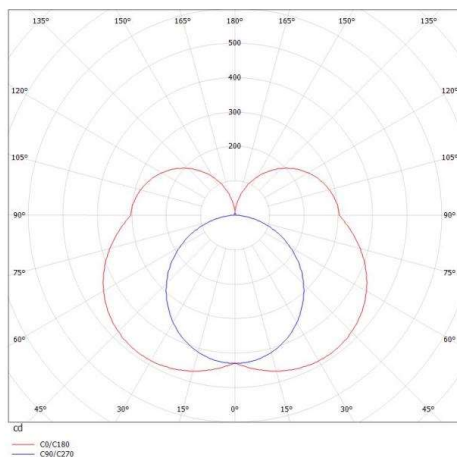

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.