


RIDE

577-012021024080

RIDE PD SUSPENSION made of die-cast aluminium, natural anodised, sated PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: not dimmable, cable transparent, adapter/ceiling base grey, pendant length 1500mm, IP20




DRAWING

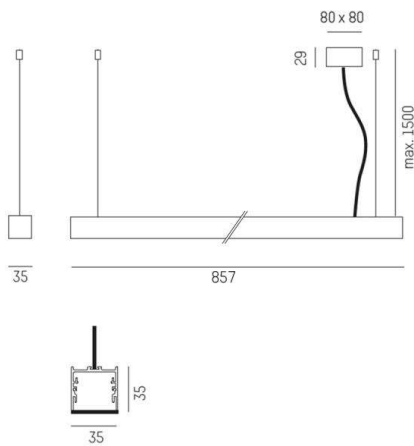

TECHNICAL DETAILS

|                             |                         |
|-----------------------------|-------------------------|
| System perform. [W]         | 15                      |
| Bulb type                   | LED                     |
| Luminous flux [lm]          | 1400                    |
| Current sec. [mA]           | 500                     |
| Colour temp. [K]            | 4000K                   |
| CRI                         | >90                     |
| Optics                      | PMMA opal diffuser flat |
| Designer                    | INHOUSE                 |
| Converter                   | with converter          |
| Dimming                     | not dimmable            |
| Light output                | direct                  |
| Voltage [V]                 | 220-240V 50/60Hz        |
| Material                    | die-cast aluminium      |
| Width [mm]                  | 35                      |
| Height [mm]                 | 35                      |
| Pendant length [mm]         | 1500                    |
| IP protection class         | IP20                    |
| Voltage class               | protection cl. I        |
| Shock resistance            | IK03                    |
| Net weight [kg]             | 1,94                    |
| Colour lamp                 | natural anodised        |
| Colour adapter/ceiling base | grey                    |
| Electric wire               | transparent             |
| EAN-Number                  | 9008905700446           |
| Lifetime [h]                | L80 B10 50 000          |
| Energy efficiency cl.       | E                       |
| No. of luminaires B16A      | 50                      |

LIGHT DISTRIBUTION CURVE

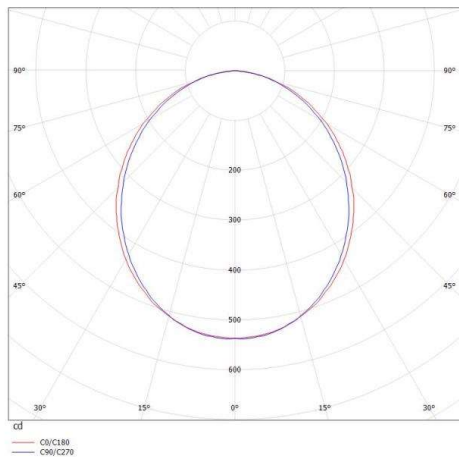

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.