


RIDE

577-01202302405d

RIDE PD SUSPENSION made of die-cast aluminium, white, similar to RAL 9016, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, max. 500mA, dimmability: DALI, cable transparent, adapter/ceiling base white, pendant length 1500mm, IP20




DRAWING

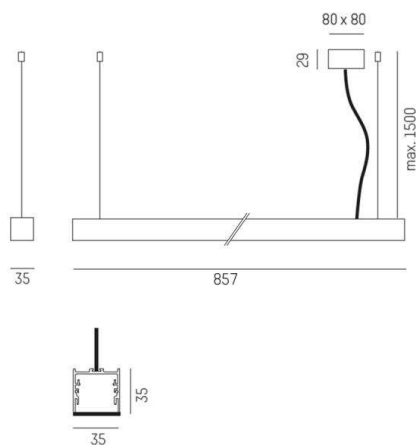

TECHNICAL DETAILS

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	1320
Current sec. [mA]	500
Colour temp. [K]	4000K
CRI	>90
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	856,6
Width [mm]	35
Height [mm]	35
Pendant length [mm]	1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK01
Net weight [kg]	2,85
Colour lamp	white
RAL	9016
Colour adapter/ceiling base	white
Electric wire	transparent
EAN-Number	9010506788822
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

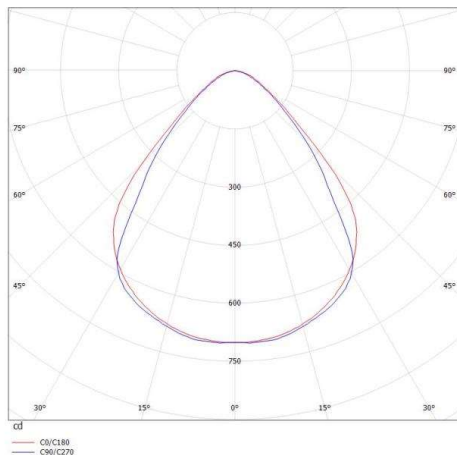

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.