LOG OUT UP & DOWN

581-4396mp

LOG OUT UP/DOWN W SURFACE MOUNTED WALL LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005,microprismatic PMMA cover for perfect anti-glare light output direct / indirect, with converter, dimmability: not dimmable, IP20

DRAWING



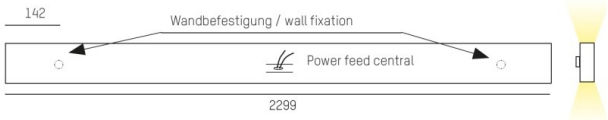

TECHNICAL DETAILS

System perform. [W]	108
Bulb type	LED
Luminous flux [lm]	9350
Colour temp. [K]	3000K
CRI	>80
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	2299
Width [mm]	60
Height [mm]	144
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	12,39
Colour lamp	black
RAL	9005
EAN-Number	9008905213090
Lifetime [h]	L80 B10 50 000

LIGHT DISTRIBUTION CURVE

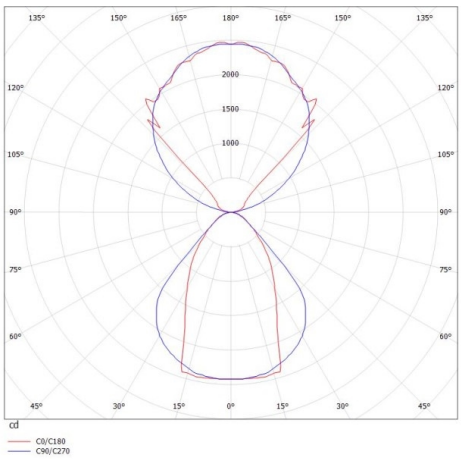

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.