


DASH L AC

599-002010129060

DASH L AC TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited aluminium reflector beam 20°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, IP20




DRAWING

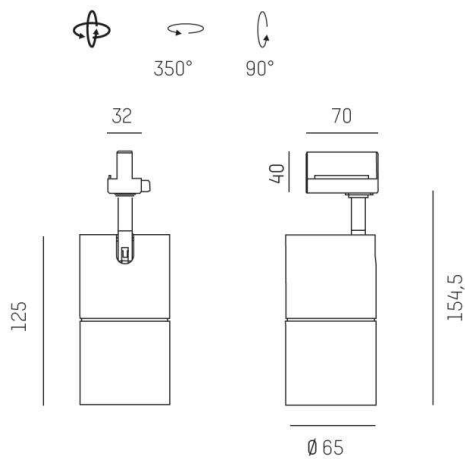

TECHNICAL DETAILS

| | |
|---------------------|--------------------------------------|
| System perform. [W] | 11 |
| Bulb type | LED |
| Luminous flux [lm] | 690 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Optics | vacuum deposited aluminium reflector |
| Designer | INHOUSE |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 20° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Height [mm] | 155 |
| Diameter [mm] | 65 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 0,60 |
| Colour lamp | black |
| RAL | 9005 |
| EAN-Number | 9008905910579 |
| Lifetime [h] | 30 000 |

LIGHT DISTRIBUTION CURVE

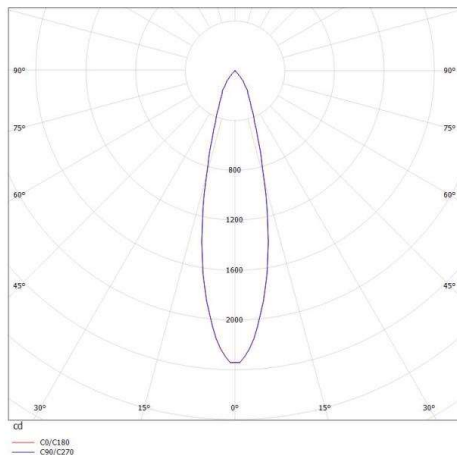

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.