


DASH L AC

599-004010229660

DASH L AC VOLARE TRACK SPOTLIGHT WITH 2 PH VOLARE ADAPTER made of aluminium, black, similar to RAL 9005,high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, swiveling 350°, tilting 90°, dimmability: not dimmable, adapter/ceiling base black, IP20




DRAWING

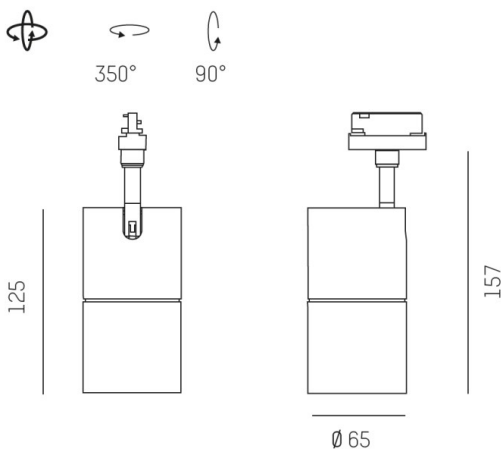

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	690
Colour temp. [K]	3000K
CRI	>90
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	157
Diameter [mm]	65
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,55
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9008905884863
Lifetime [h]	30 000

LIGHT DISTRIBUTION CURVE

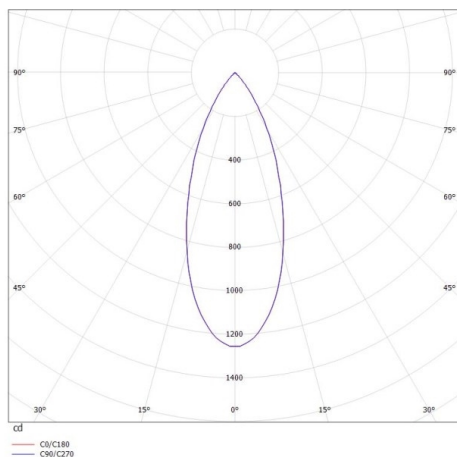

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.