


DASH L AC

599-006010224060

DASH L AC SD SURFACE MOUNTED SPOTLIGHT made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, swiveling 350°, tilting 90°, dimmable not dimmable, IP20



DRAWING

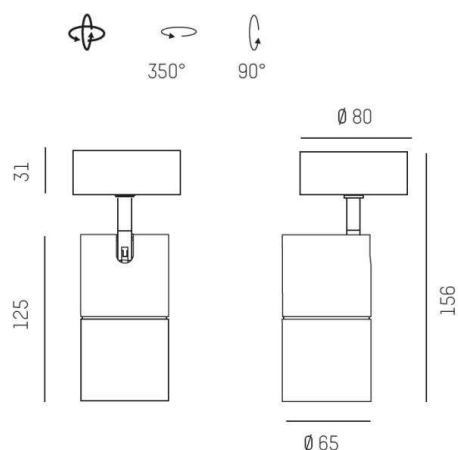


TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	720
Colour temp. [K]	4000K
CRI	>90
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Height [mm]	156
Diameter [mm]	65
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,64

LIGHT DISTRIBUTION CURVE

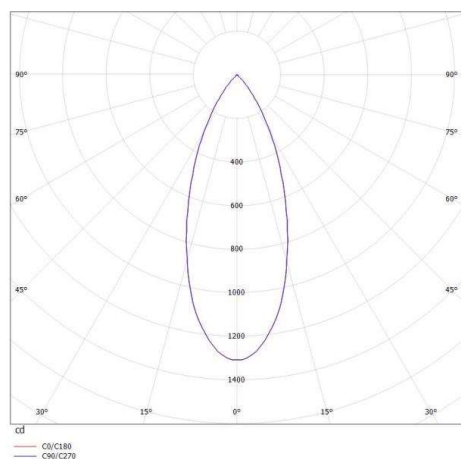

Color lamp	black
RAL	9005
EAN-Number	9008905888700
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.