


**AFTER8 LONG**

**601-02051102470a**


AFTER 8 LONG PDI SUSPENSION made of aluminium, graphite grey anodised, sated PMMA opal diffuser light output direct / indirect 60:40, with converter, max. 1050mA, dimmable 1-10V, cable Tension control in the suspension ropes, adapter/ceiling base white, pendant length 2000mm, IP20



**DRAWING**

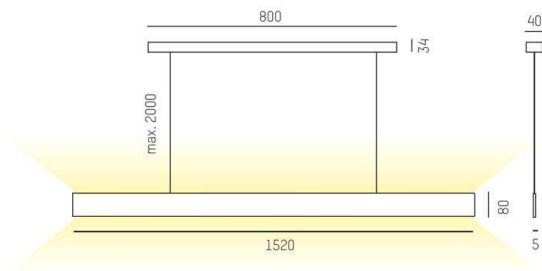

**LIGHT DISTRIBUTION CURVE**

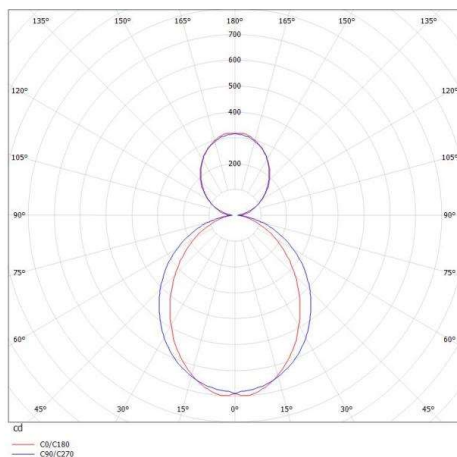

**TECHNICAL DETAILS**

System perform. [W]	51
Bulb type	LED
Luminous flux [lm]	2400
Current sec. [mA]	1050
Colour temp. [K]	4000K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	1-10V
Light output	direct / indirect 60:40
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Width [mm]	5
Height [mm]	80
Pendant length [mm]	2000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	3,63
Color lamp	graphite grey anodised
Color adapter/ceiling base	white
Electric wire	Tension control in the suspension ropes
EAN-Number	9008905929229
Lifetime [h]	L80 B10 50 000
No. of luminaires B16A	34



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.