


**AFTER8 LONG**

**601-02051102962a**

AFTER 8 LONG PDI SUSPENSION made of aluminium, bronze anodised, sated PMMA opal diffuser light output direct / indirect 60:40, with converter, max. 1050mA, dimmable 1-10V, cable Tension control in the suspension ropes, adapter/ceiling base white, pendant length 2000mm, IP20




**DRAWING**

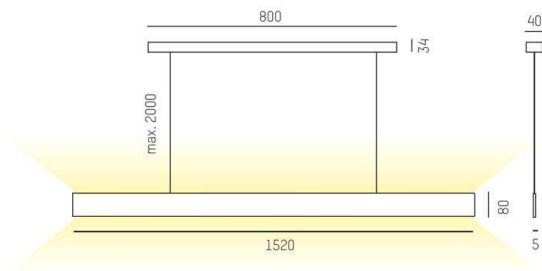

**TECHNICAL DETAILS**

|                            |   |
|----------------------------|---|
| System perform. [W]        | 51                                      |
| Bulb type                  | LED                                     |
| Luminous flux [lm]         | 2400                                    |
| Current sec. [mA]          | 1050                                    |
| Colour temp. [K]           | 3000K                                   |
| CRI                        | >90                                     |
| Optics                     | PMMA opal diffuser                      |
| Designer                   | INHOUSE                                 |
| Converter                  | with converter                          |
| Dimming                    | 1-10V                                   |
| Light output               | direct / indirect 60:40                 |
| Voltage [V]                | 220-240V 50/60Hz                        |
| Material                   | aluminium                               |
| Width [mm]                 | 5                                       |
| Height [mm]                | 80                                      |
| Pendant length [mm]        | 2000                                    |
| IP protection class        | IP20                                    |
| Voltage class              | protection cl. I                        |
| Net weight [kg]            | 3,63                                    |
| Color lamp                 | bronze anodised                         |
| Color adapter/ceiling base | white                                   |
| Electric wire              | Tension control in the suspension ropes |
| EAN-Number                 | 9008905929076                           |
| Lifetime [h]               | L80 B10 50 000                          |
| No. of luminaires B16A     | 34                                      |

**LIGHT DISTRIBUTION CURVE**

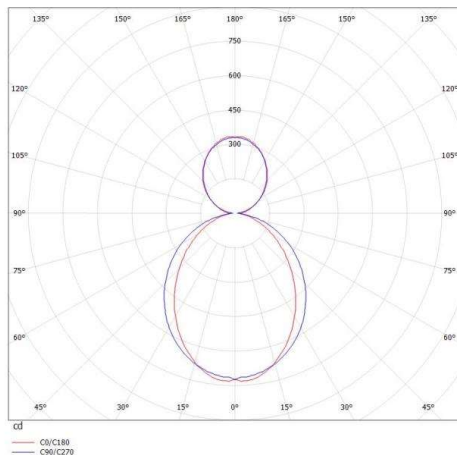

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.