


TRAIL

610-1300041147440

TRAIL MOVA M MOUNTING RAIL LIGHT INSERT made of aluminium, grey, similar to RAL 9006, decor grey, high-efficiently vacuum deposited aluminium reflector without safety glass beam asymmetric, light output direct, swiveling 350, tilting 90, with converter, max. 800mA, dimmability: not dimmable, through wiring 7-polig, adapter/ceiling base grey, IP20




DRAWING

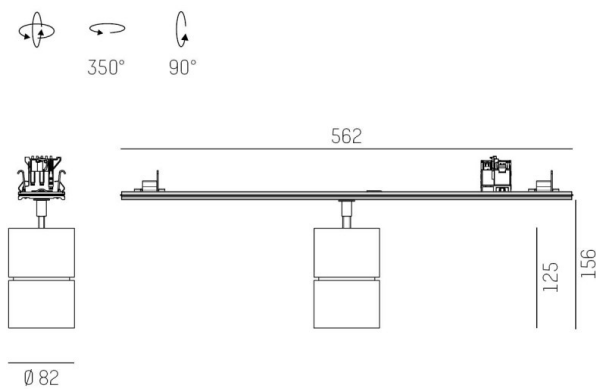

TECHNICAL DETAILS

System perform. [W]	31
Bulb type	LED
Luminous flux [lm]	3290
Current sec. [mA]	800
Colour temp. [K]	3500K
CRI	PREMIUM>90
Optics	aluminium reflector without protection glass
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Through wiring	7-polig
Material	aluminium
Length [mm]	564,9
Height [mm]	156
Diameter [mm]	82
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,95
Colour lamp	grey
RAL	9006
Colour adapter/ceiling base	grey
Colour decor	grey
EAN-Number	9010870131422
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

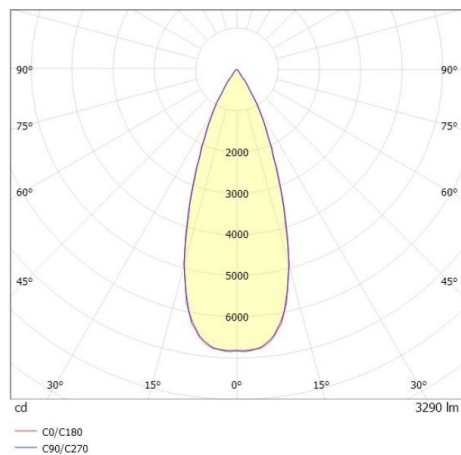

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.