RIDE LENS

634-00202032306

RIDE LENS R RECESSED WALL / CEILING LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, lens optic with anti-glare grid shiny black, beam 45°, light output direct, UGR <19, without converter, max. 900mA, dimmability: see converter, IP20

DRAWING

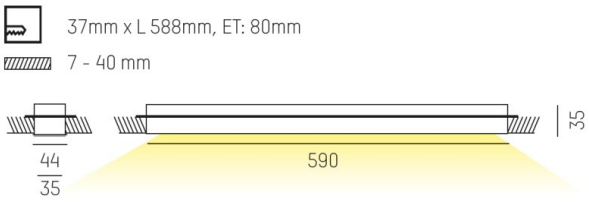

TECHNICAL DETAILS

Bulb type	LED
Luminous flux [lm]	2560
Current sec. [mA]	900
Colour temp. [K]	2700K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Designer	INHOUSE
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	45°
Material	die-cast aluminium
Length [mm]	590
Width [mm]	44
Ceiling cutout [mm]	37x588
Ceiling thickness [mm]	7-40
Recess depth [mm]	80
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,87
Colour lamp	black
RAL	9005
Colour of glass/shade	shiny black
EAN-Number	9008905674648
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

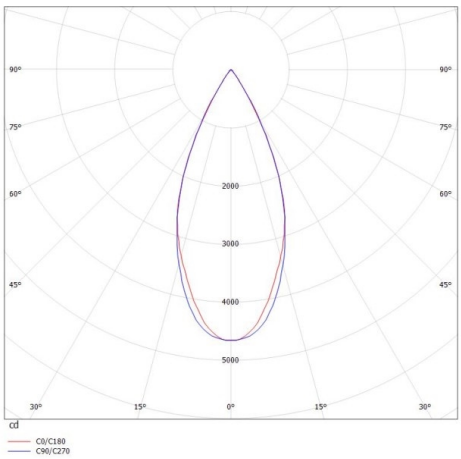

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.