


RIDE LENS

634-00204032408

RIDE LENS R RECESSED WALL / CEILING LUMINAIRE made of die-cast aluminium, natural anodised, lens optic with anti-glare grid shiny black, beam 45°, light output direct, UGR <19, without converter, max. 500mA, dimmability: see converter, IP20

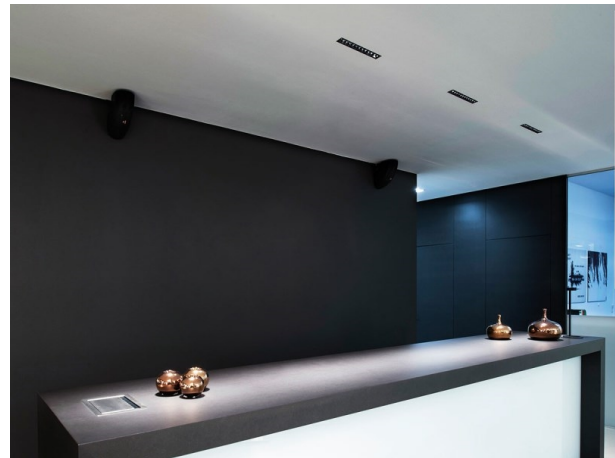


DRAWING




37mm x L 111mm, ET: 80mm



7 - 40 mm

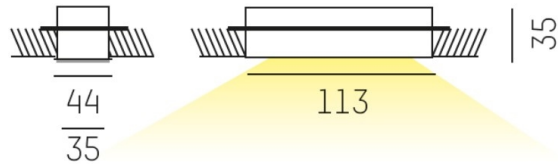

LIGHT DISTRIBUTION CURVE

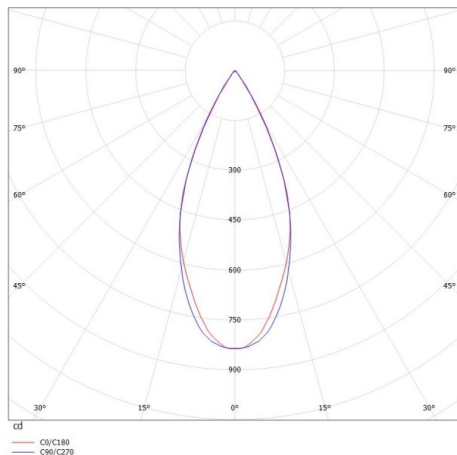

TECHNICAL DETAILS

Bulb type	LED
Luminous flux [lm]	460
Current sec. [mA]	500
Colour temp. [K]	4000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Designer	INHOUSE
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	45°
Material	die-cast aluminium
Length [mm]	113
Width [mm]	44
Ceiling cutout [mm]	37x111
Ceiling thickness [mm]	7-40
Recess depth [mm]	80
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,41
Colour lamp	natural anodised
Colour of glass/shade	shiny black
EAN-Number	9008905862342
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.