


**NOW 2 DOUBLE**

**635-00300054904v1**

NOW 2 SQUARE DOUBLE R RECESSED SPOTLIGHT made of aluminium, grey, similar to RAL 9006, high-efficiently vacuum deposited aluminium reflector beam 25°, light output direct, tilting 30°, without converter, max. 350/500mA, dimmability: see converter, IP20




**DRAWING**

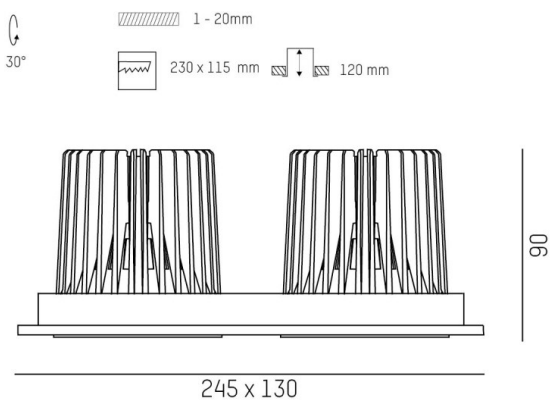

**TECHNICAL DETAILS**

Bulb type	LED 12W/17W
No. of bulb holders	2x
Luminous flux [lm]	3010/4140
Current sec. [mA]	350/500
Colour temp. [K]	3000K
CRI	PREMIUM>90
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	25°
Material	aluminium
Length [mm]	245
Width [mm]	130
Height [mm]	90
Ceiling cutout [mm]	230x115
Ceiling thickness [mm]	1-20
Recess depth [mm]	120
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,20
Colour lamp	grey
RAL	9006
EAN-Number	9010870124400
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E

**LIGHT DISTRIBUTION CURVE**

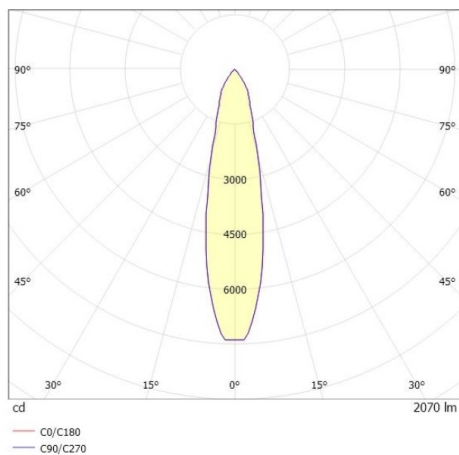

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.