
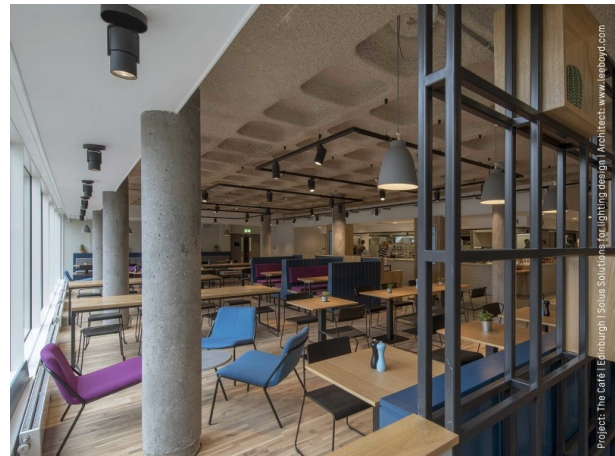



2GO

637-00502054904dv2

2 GO SD SURFACE MOUNTED SPOTLIGHT made of aluminium, grey, similar to RAL 9006, high-efficiently vacuum deposited aluminium reflector beam asymmetric, light output direct, swiveling 350°, tilting 180°, with converter, max. 700mA, dimmability: DALI, adapter/ceiling base grey, IP20

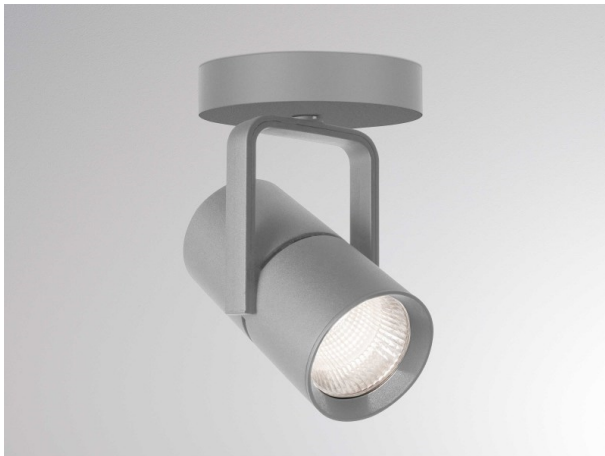


DRAWING

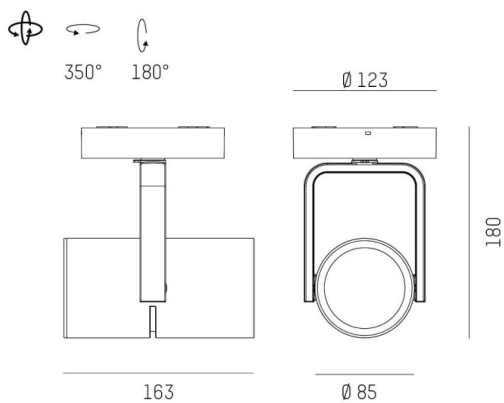

TECHNICAL DETAILS

|                             |                                      |
|-----------------------------|--------------------------------------|
| System perform. [W]         | 27                                   |
| Bulb type                   | LED                                  |
| Luminous flux [lm]          | 2820                                 |
| Current sec. [mA]           | 700                                  |
| Colour temp. [K]            | 3000K                                |
| CRI                         | PREMIUM>90                           |
| Optics                      | vacuum deposited aluminium reflector |
| Designer                    | INHOUSE                              |
| Converter                   | with converter                       |
| Light output                | direct                               |
| Beam angle [°]              | asymmetrisch                         |
| Voltage [V]                 | 220-240V 50/60Hz                     |
| Material                    | aluminium                            |
| Length [mm]                 | 174,9                                |
| Height [mm]                 | 180                                  |
| Diameter [mm]               | 85                                   |
| IP protection class         | IP20                                 |
| Voltage class               | protection cl. I                     |
| Shock resistance            | IK04                                 |
| Net weight [kg]             | 1,24                                 |
| Colour lamp                 | grey                                 |
| RAL                         | 9006                                 |
| Colour adapter/ceiling base | grey                                 |
| EAN-Number                  | 9010870107762                        |
| Lifetime [h]                | L80 B10 50 000                       |
| Energy efficiency cl.       | E                                    |
| No. of luminaires B16A      | 50                                   |

LIGHT DISTRIBUTION CURVE

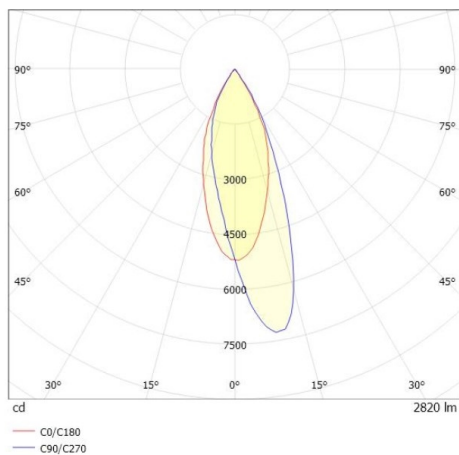

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.