


**BLIND SPOT**

**640-00201032300**

BLINDSPOT R RECESSED SPOTLIGHT made of aluminium, natural, anti-glare LFO lens due to microfaceted structure beam 55°, light output direct, UGR <16, without converter, max. 700mA, IP20 Please order accessories separately




**DRAWING**

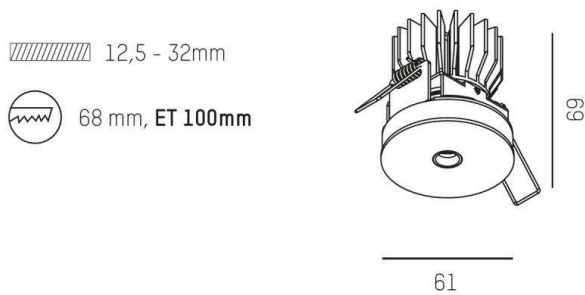

**TECHNICAL DETAILS**

Bulb type	LED 9W
Luminous flux [lm]	430
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	LFO lens
Designer	Serge Cornelissen
Converter	without converter
Light output	direct
Beam angle [°]	55°
Material	aluminium
Height [mm]	69
Diameter [mm]	61
Ceiling cutout [mm]	68
Ceiling thickness [mm]	12,5 - 32
Recess depth [mm]	100
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,26
Color lamp	natural
EAN-Number	9008905740275
Lifetime [h]	L80 B10 50 000

**LIGHT DISTRIBUTION CURVE**

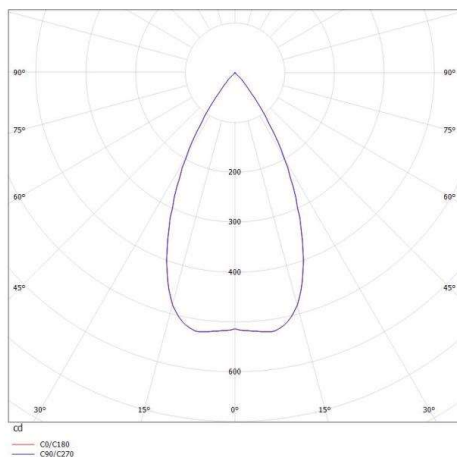

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.