


BIVIO

645-101030519120

BIVIO W SPOT SURFACE MOUNTED WALL LUMINAIRE made of aluminium, black matt, similar to RAL 9005, linen shade grey, beam 12°, light output direct / indirect, with converter, dimmability: not dimmable, IP20 asymmetric mounting, with reading light



DRAWING

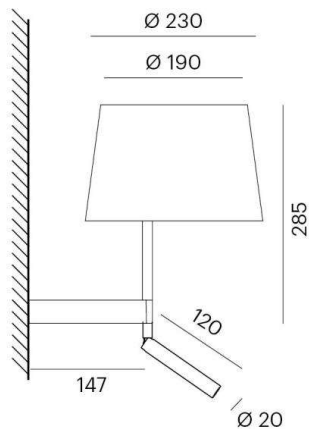

LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

System perform. [W]	4
Bulb type	AGL D45 ECO 30W
No. of bulb holders	1x
Socket	E14
Luminous flux [lm]	130
Colour temp. [K]	3000K
CRI	>80
Optics	linen shade
Designer	Michael Raasch
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Beam angle [°]	12°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	203
Diameter [mm]	230
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,70
Colour lamp	black matt
RAL	9005
Colour of glass/shade	grey
EAN-Number	9010506723625
Lifetime [h]	50 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.