


LASH

660-40195ddd

LASH SYSTEM SD SYSTEM LUMINAIRE made of metal, white chrome, satined PMMA opal diffuser satined white, light output direct, with converter, dimmability: DALI, through wiring 5x0,75mm<sup>2</sup>, IP20




DRAWING

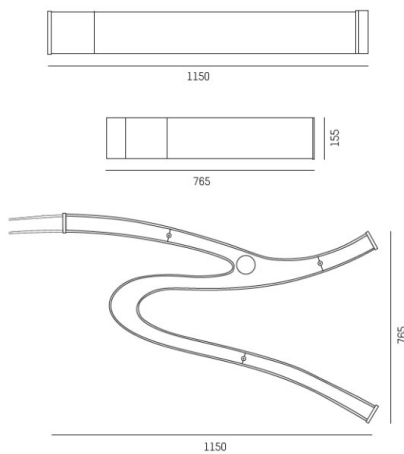

TECHNICAL DETAILS

System perform. [W]	48
Bulb type	LED
Luminous flux [lm]	5100
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Designer	Serge Cornelissen
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	5x0,75mm <sup>2</sup>
Material	metal
Length [mm]	1150
Width [mm]	765
Height [mm]	155
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	7,57
Colour lamp	white chrome
Colour of glass/shade	satined white
EAN-Number	900890512599
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	20

LIGHT DISTRIBUTION CURVE

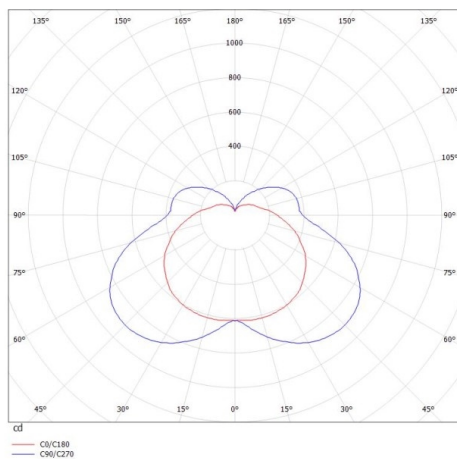

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.