


AKON

661-003020524060


AKON 2 SD WALL / CEILING LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, microfaceted free-form reflector light output direct, with converter, max. 350mA, dimmable not dimmable, IP20



DRAWING

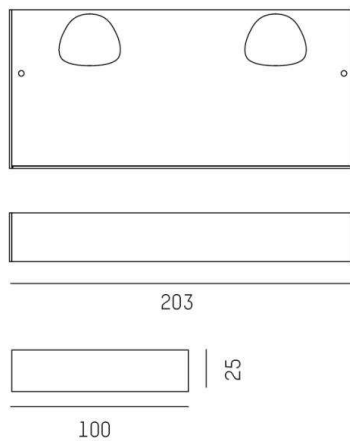

LIGHT DISTRIBUTION CURVE

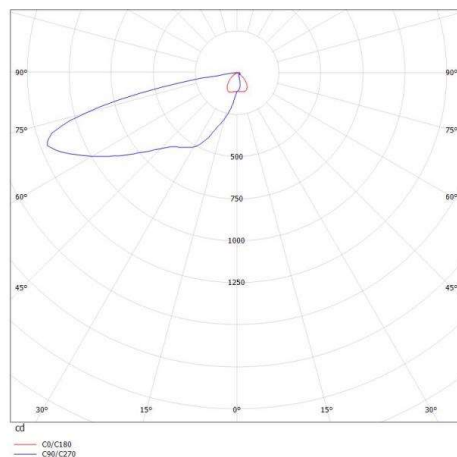

TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	650
Current sec. [mA]	350
Colour temp. [K]	4000K
CRI	>80
Optics	microfaceted free-form reflector
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	203
Width [mm]	100
Height [mm]	25
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,47
Color lamp	black
RAL	9005
EAN-Number	9008905724053
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.