# TRIGGA

**662-01602052365r**

TRIGGA LONG VOLARE DIMM SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, white, similar to RAL 9016,anti-glare LFO lens due to microfacetted structure beam 55°, light output direct, with converter, max. 350mA, dimmability: Loxone Air, cable white, fabric, adapter/ceiling base black, pendant length 1500mm, IP20

## DRAWING

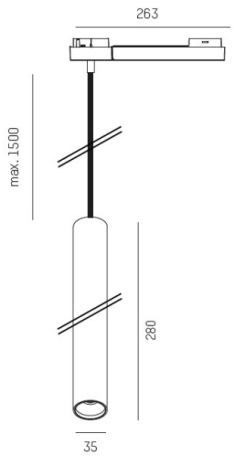


## LIGHT DISTRIBUTION CURVE

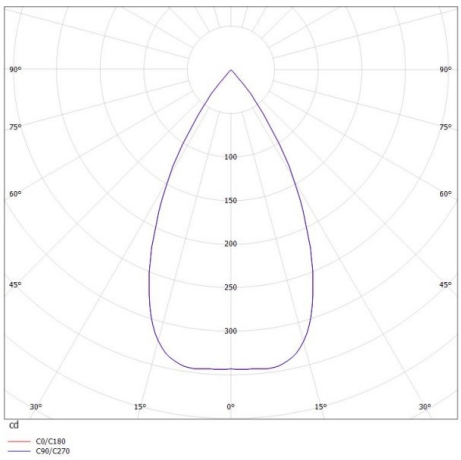


## TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 6 |
| Bulb type | LED |
| Luminous flux [lm] | 270 |
| Current sec. [mA] | 350 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Optics | LFO lens |
| Designer | Serge Cornelissen |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | 55° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| | |
| Length [mm] | 35 |
| Height [mm] | 280 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 35 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,89 |
| | |
| Colour lamp | white |
| RAL | 9016 |
| Colour adapter/ceiling base | black |
| Electric wire | white, fabric |
| EAN-Number | 9010506225310 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | G |
| No. of luminaires B16A | 27 |

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.