TRIGGA

662-01902052369z

TRIGGA LOON MINI VOLARE DIMM SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, black matt, similar to RAL 9005, anti-glare LF0 lens due to microfacetted structure grey, beam 55°, light output direct, with converter, max. 350mA, dimmability: Zigbee 3.0, cable black, fabric, adapter/ceiling base black, pendant length 1500mm, IP20

DRAWING

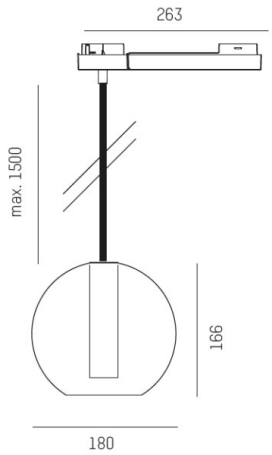

LIGHT DISTRIBUTION CURVE

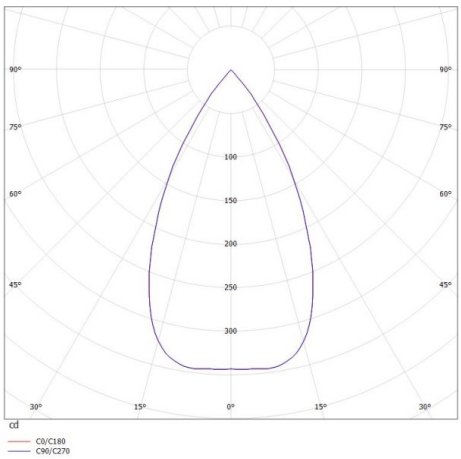

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	270
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
Optics	LF0 lens
Designer	Serge Cornelissen
Converter	with converter
Light output	direct
Beam angle [°]	55°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	180
Height [mm]	166
Pendant length [mm]	1500
Diameter [mm]	180
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,26
Colour lamp	black matt
RAL	9005
Colour of glass/shade	grey
Colour adapter/ceiling base	black
Electric wire	black, fabric
EAN-Number	9008905765902
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	G
No. of luminaires B16A	27

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.