



TRIGGA

662-020020223180

TRIGGA XL VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, bronze, anti-glare LFO lens due to microfaceted structure beam 30°, light output direct, UGR <16, with converter, max. 350mA, dimmability: not dimmable, cable black, fabric, adapter/ceiling base chrome, pendant length 1500mm, IP20

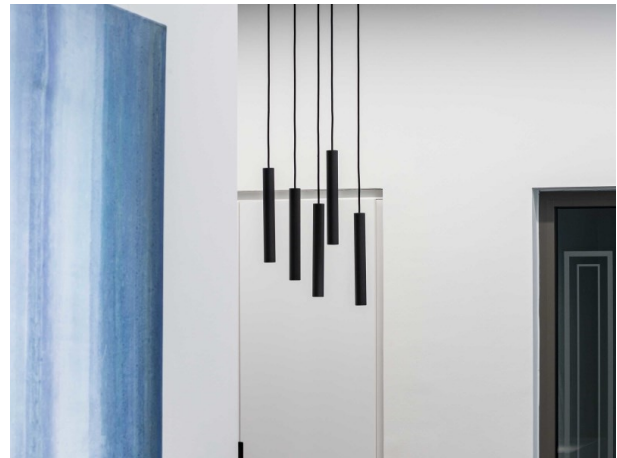


DRAWING

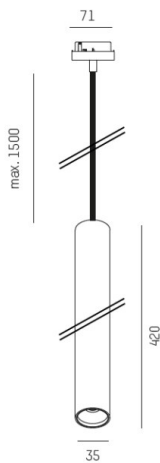

TECHNICAL DETAILS

| | |
|-----------------------------|-------------------|
| System perform. [W] | 6 |
| Bulb type | LED |
| Luminous flux [lm] | 230 |
| Current sec. [mA] | 350 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| UGR | <16 |
| Optics | LFO lens |
| Designer | Serge Cornelissen |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 30° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 35 |
| Height [mm] | 420 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 35 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 1,23 |
| Colour lamp | bronze |
| Colour adapter/ceiling base | chrome |
| Electric wire | black, fabric |
| EAN-Number | 9010506718218 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | G |
| No. of luminaires B16A | 50 |

LIGHT DISTRIBUTION CURVE

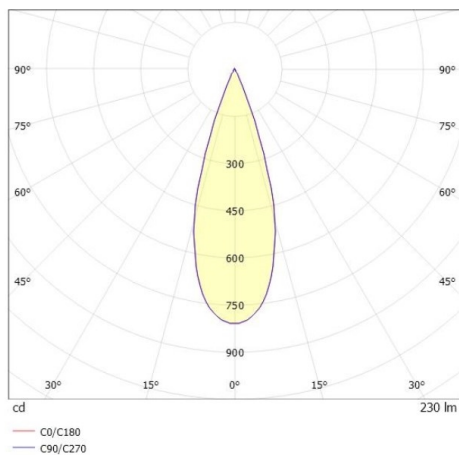

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.