# RIDE RING LINEAR S

**675-30701102304d**

RIDE RING SYSTEM LINEAR SYSTEM LUMINAIRE made of die-cast aluminium, grey, similar to RAL 9006,satined PMMA diffuser for homogeneous illumination light output direct, with converter, max. 500mA, dimmability: DALI, IP20

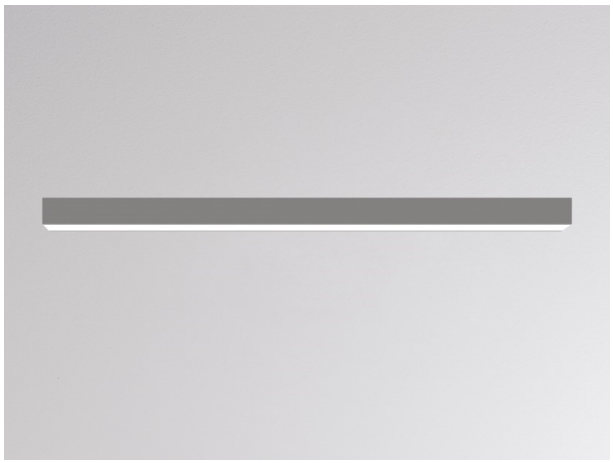

## DRAWING

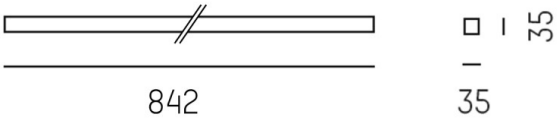


## TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 15 |
| Bulb type | LED |
| Luminous flux [lm] | 1230 |
| Current sec. [mA] | 500 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Optics | PMMA opal diffuser flat |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Material | die-cast aluminium |
| | |
| Length [mm] | 842 |
| Width [mm] | 35 |
| Height [mm] | 35 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 1,88 |
| | |
| Colour lamp | grey |
| RAL | 9006 |
| EAN-Number | 9010506281248 |
| Lifetime [h] | L80 B10 50 000 |
| No. of luminaires B16A | 50 |

## LIGHT DISTRIBUTION CURVE

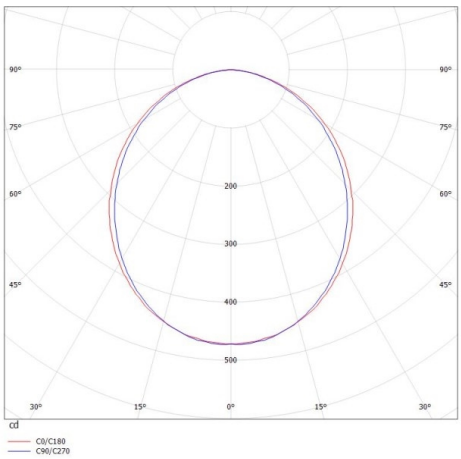


CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.