


DASH L DC

676-005010224160v1

DASH L DC PD SUSPENSION made of aluminium, white black, similar to RAL 9016, high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, with converter, max. 150mA, dimmable not dimmable, cable white, fabric, adapter/ceiling base white, pendant length 1600mm, IP20



DRAWING

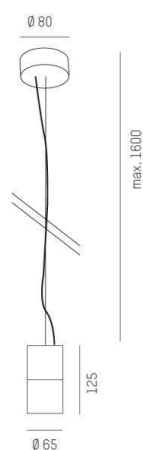

LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

| | |
|----------------------------|--------------------------------------|
| System perform. [W] | 6 |
| Bulb type | LED |
| Luminous flux [lm] | 400 |
| Current sec. [mA] | 150 |
| Colour temp. [K] | 4000K |
| CRI | >90 |
| Optics | vacuum deposited aluminium reflector |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 40° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Height [mm] | 125 |
| Pendant length [mm] | 1600 |
| Diameter [mm] | 65 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 0,93 |
| Color lamp | white black |
| RAL | 9016 |
| Color adapter/ceiling base | white |
| Electric wire | white, fabric |
| EAN-Number | 9010506092448 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.