



SPOON QUADRO LED

68-635101ww


SPOON QUADRO LED RECESSED WALL LUMINAIRE made of aluminium, white, light output indirect, without converter, max. 350/500mA, dimmable not dimmable, IP40

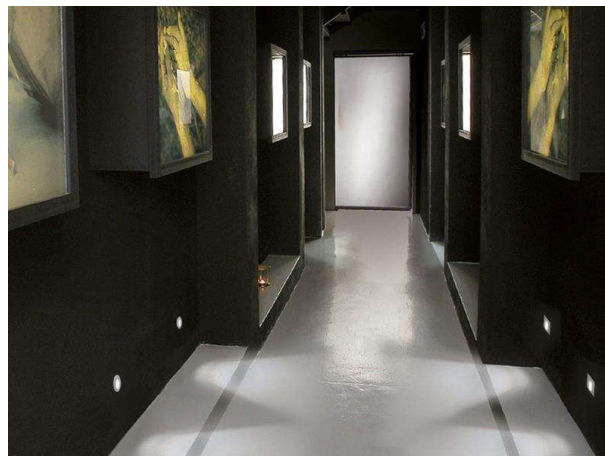

DRAWING

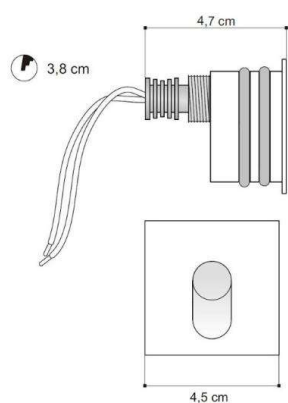

LIGHT DISTRIBUTION CURVE

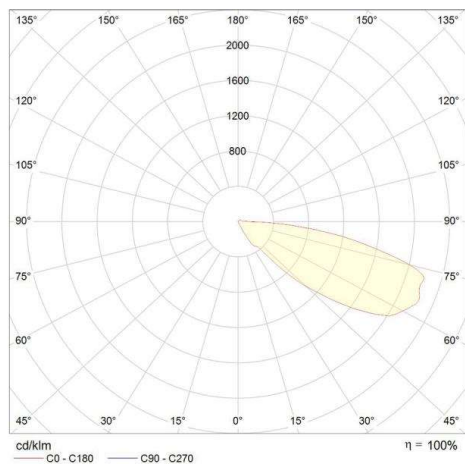

TECHNICAL DETAILS

| | |
|---------------------|--------------------|
| System perform. [W] | 2 |
| Bulb type | LED 2W |
| Luminous flux [lm] | 65 |
| Current sec. [mA] | 350/500 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Converter | without converter |
| Dimming | nicht dimmbar |
| Light output | indirect |
| Material | aluminium |
| Length [mm] | 45 |
| Width [mm] | 45 |
| Ceiling cutout [mm] | 38 |
| Recess depth [mm] | 47 |
| IP protection class | IP40 |
| Voltage class | protection cl. III |
| Net weight [kg] | 0,08 |

| | |
|-----------------------|---------------|
| Color lamp | white |
| EAN-Number | 9010506371062 |
| Lifetime [h] | 35 000 |
| Energy efficiency cl. | A++-A |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.