



SPOON QUADRO LED

68-635145ww

SPOON QUADRO LED RECESSED WALL LUMINAIRE made of aluminium, natural anodised, light output indirect, without converter, max. 350/500mA, dimmable not dimmable, IP40

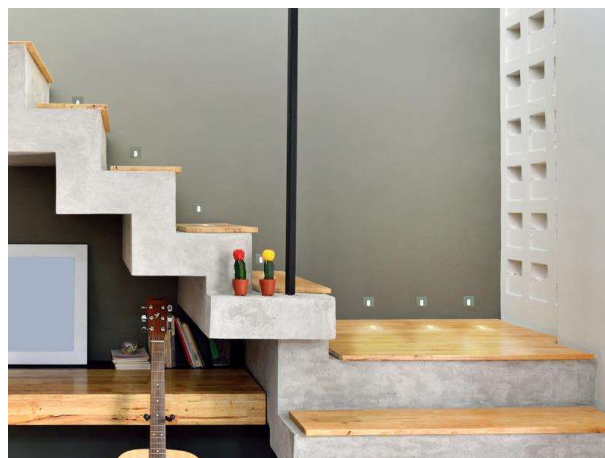

DRAWING

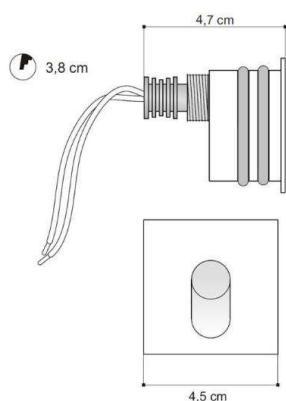


TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED 2W
Luminous flux [lm]	65
Current sec. [mA]	350/500
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Dimming	nicht dimmbar
Light output	indirect
Material	aluminium

Length [mm]	45
Width [mm]	45
Ceiling cutout [mm]	38
Recess depth [mm]	47
IP protection class	IP40
Voltage class	protection cl. III
Net weight [kg]	0,08

LIGHT DISTRIBUTION CURVE

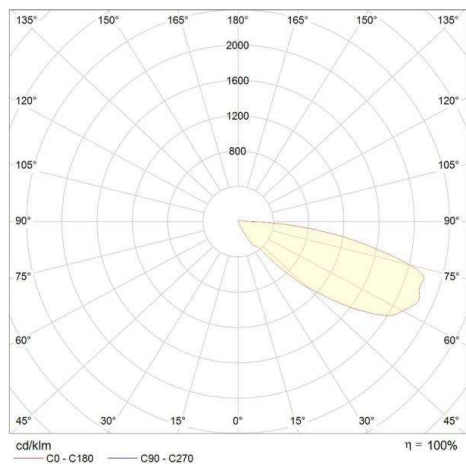

Color lamp	natural anodised
EAN-Number	9010506371079
Lifetime [h]	35 000
Energy efficiency cl.	A++-A



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.