


STAR

68-669002ww40

STAR 1 RECESSED CEILING LUMINAIRE made of aluminium, black, beam 40°, light output direct, without converter, max. 350mA, dimmability: not dimmable, IP40




DRAWING

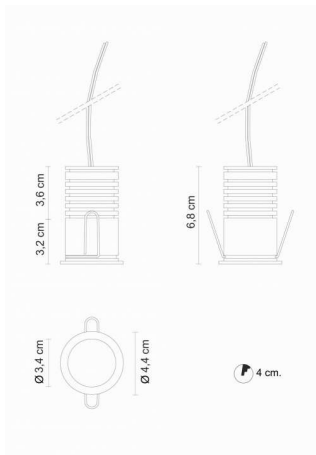

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED 6W
Luminous flux [lm]	939
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Material	aluminium
Height [mm]	68
Diameter [mm]	44
Ceiling cutout [mm]	40
Recess depth [mm]	88
IP protection class	IP40
Voltage class	protection cl. III
Net weight [kg]	0,14
Colour lamp	black
EAN-Number	9010506448825
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

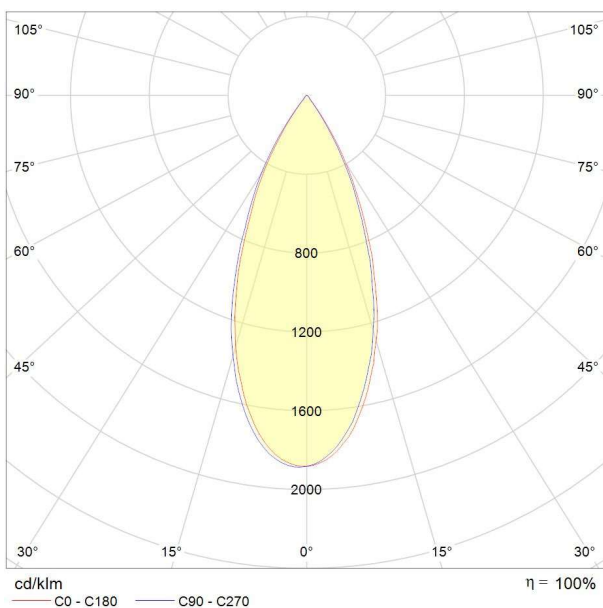

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.