




DARK NIGHT M


684-00204052406v2

DARK NIGHT MEDIUM R RECESSED SPOTLIGHT made of aluminium, black matt, similar to RAL 9005, decor gold,high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, UGR <16, without converter, max. 500/700/900mA, dimmability: see converter, IP20

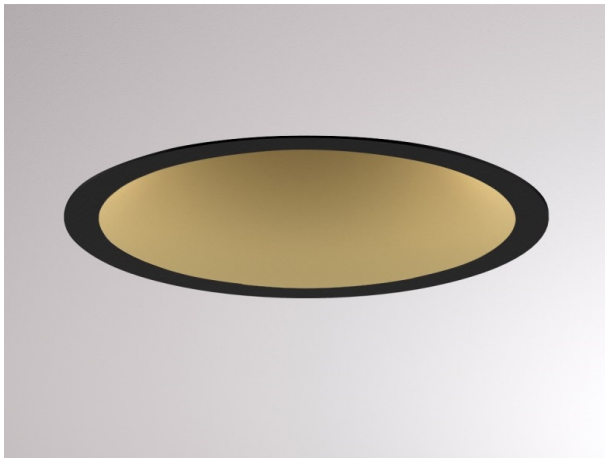


DRAWING

 1 - 25mm
 150 mm, ET 136 mm

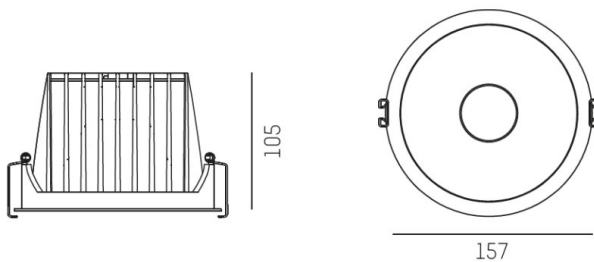

LIGHT DISTRIBUTION CURVE

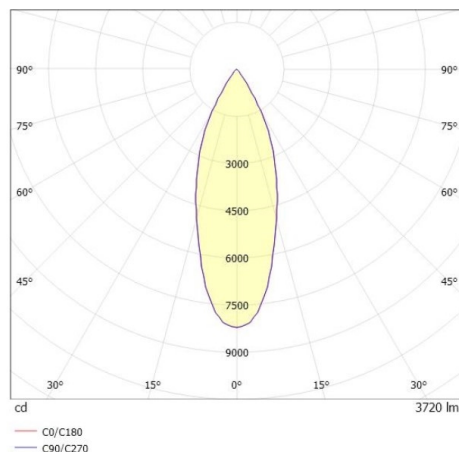

TECHNICAL DETAILS

| | |
|------------------------|--------------------------------------|
| Bulb type | LED 18/25/33W |
| Luminous flux [lm] | 2240/3020/3720 |
| Current sec. [mA] | 500/700/900 |
| Colour temp. [K] | 4000K |
| CRI | >90 |
| UGR | <16 |
| Optics | vacuum deposited aluminium reflector |
| Designer | INHOUSE |
| Converter | without converter |
| Dimming | see converter |
| Light output | direct |
| Beam angle [°] | 40° |
| Material | aluminium |
| Length [mm] | 157 |
| Height [mm] | 111 |
| Diameter [mm] | 157 |
| Ceiling cutout [mm] | 150 |
| Ceiling thickness [mm] | 1-25 |
| Recess depth [mm] | 141 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Shock resistance | IK02 |
| Net weight [kg] | 0,36 |
| Colour lamp | black matt |
| RAL | 9005 |
| Colour decor | gold |
| EAN-Number | 9010870110700 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.