


DARK NIGHT XS

684-006040843660v1


DARK NIGHT XS PD SUSPENSION made of aluminium, black matt, similar to RAL 9005, decor gold, high-efficiently vacuum deposited aluminium reflector beam 60°, light output direct, UGR <19, with converter, max. 500mA, dimmability: not dimmable, cable black, adapter/ceiling base black, pendant length 3000mm, IP20



DRAWING

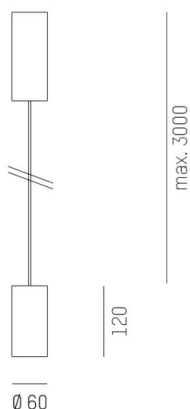

LIGHT DISTRIBUTION CURVE

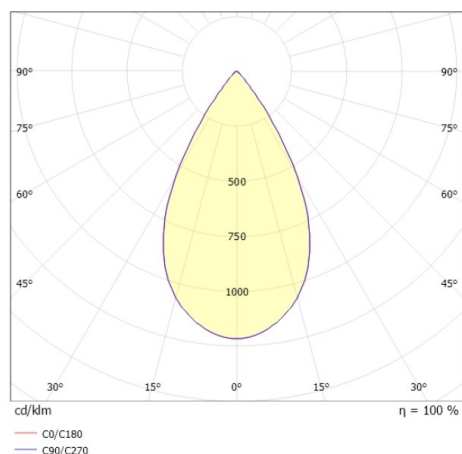

TECHNICAL DETAILS

System perform. [W]	20
Bulb type	LED
Luminous flux [lm]	1380
Current sec. [mA]	500
Colour temp. [K]	2700K
CRI	PREMIUM>90
UGR	<19
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	60°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	60
Height [mm]	120
Pendant length [mm]	3000
Diameter [mm]	60
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	0,79
Colour lamp	black matt
RAL	9005
Colour adapter/ceiling base	black
Colour decor	gold
Electric wire	black
EAN-Number	9010506863352
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	53



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.