MOLTO LUCE®

# DARK NIGHT XS

**684-007040543550v1**

DARK NIGHT XS VOLARE SUSPENSION WITH 2-PH VOLARE ADAPTER made of aluminium, white, similar to RAL 9016, decor gold,high-efficiently vacuum deposited aluminium reflector beam 40°, light output direct, UGR <19, with converter, max. 400mA, dimmability: not dimmable, cable white, adapter/ceiling base white, pendant length 3000mm, IP20

## DRAWING

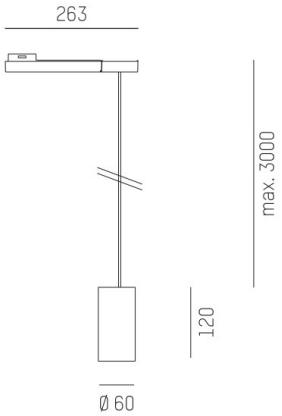


## LIGHT DISTRIBUTION CURVE

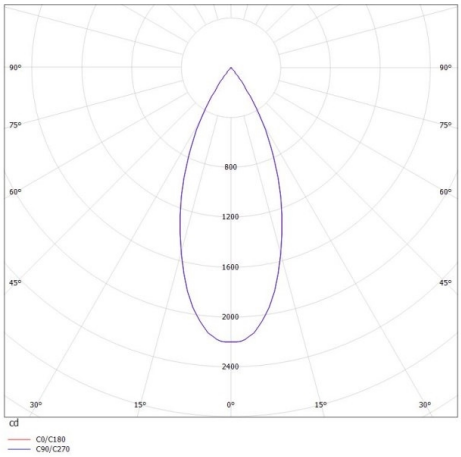


## TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 16 |
| Bulb type | LED |
| Luminous flux [lm] | 1160 |
| Current sec. [mA] | 400 |
| Colour temp. [K] | 2700K |
| CRI | PREMIUM>90 |
| UGR | <19 |
| Optics | vacuum deposited aluminium reflector |
| Designer | INHOUSE |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 40° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| | |
| Height [mm] | 120 |
| Pendant length [mm] | 3000 |
| Diameter [mm] | 60 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,47 |
| | |
| Colour lamp | white |
| RAL | 9016 |
| Colour adapter/ceiling base | white |
| Colour decor | gold |
| Electric wire | white |
| EAN-Number | 9010506115949 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | E |

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.