

TOUCH DOWN

692-001010543660v2

TOUCH DOWN PD SUSPENSION black, similar to RAL 9005,high-efficiently vacuum deposited aluminium reflector beam 24°, light output direct, with converter, max. 700mA, dimmability: not dimmable, cable transparent, adapter/ceiling base black, pendant length 1500mm, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	25
Bulb type	LED
Luminous flux [lm]	2390
Current sec. [mA]	700
Colour temp. [K]	2700K
CRI	PREMIUM>90
Optics	vacuum deposited aluminium reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	24°
Voltage [V]	220-240V 50/60Hz
Height [mm]	400
Pendant length [mm]	1500
Diameter [mm]	120
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,32
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
Electric wire	transparent
EAN-Number	9010870131040
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	E
No. of luminaires B16A	34

LIGHT DISTRIBUTION CURVE

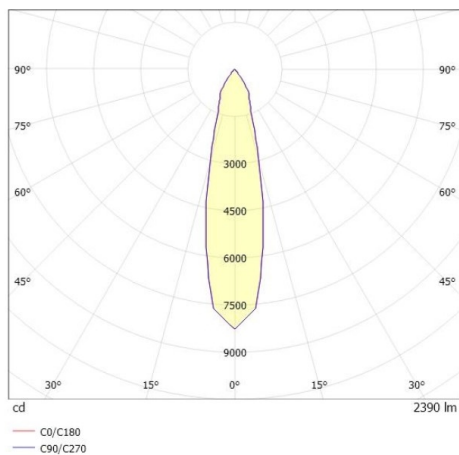

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.