

SYSTEM01.1

697-11000301906m

SYSTEM 01.1 PDI SUSPENSION made of die-cast aluminium, black, similar to RAL 9005, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, max. 300mA, dimmability: motion swarm, with motion detector, day light control and swarm function, cable transparent, adapter/ceiling base black matt, pendant length 1500mm, IP20 out of the box mode - with activated daylight control and motion detection




DRAWING

TECHNICAL DETAILS

System perform. [W]	50
Bulb type	LED
Luminous flux [lm]	7540
Current sec. [mA]	300
Colour temp. [K]	3000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Designer	INHOUSE
Converter	with converter
Dimming	motion swarm
Motion detector	with motion detector, day light control and swarm function
Light output	direct / indirect
Voltage [V]	220-240V AC/DC
Material	die-cast aluminium
Length [mm]	1244
Width [mm]	176
Height [mm]	37
Pendant length [mm]	1500
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	6,73
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black matt
Electric wire	transparent
EAN-Number	9010506849035
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	21

LIGHT DISTRIBUTION CURVE

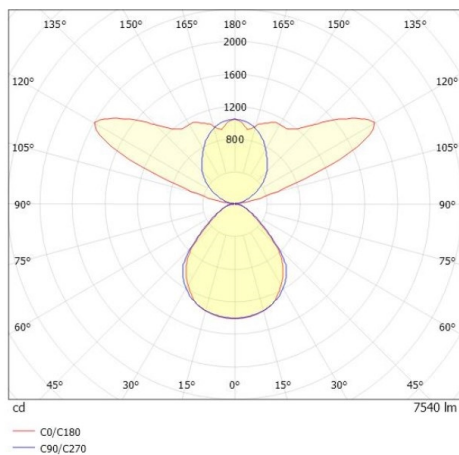

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.