



ARTIS

704-21101018406v1


ARTIS 1 R RECESSED DOWNLIGHT made of aluminium, black, similar to RAL 9005, high-efficiently vacuum deposited synthetic reflector beam asymmetric, light output direct, tilting 30°, without converter, max. 800mA, dimmability: see converter, IP20 with the option of attaching the Lightguider for lighting the 3rd level



DRAWING

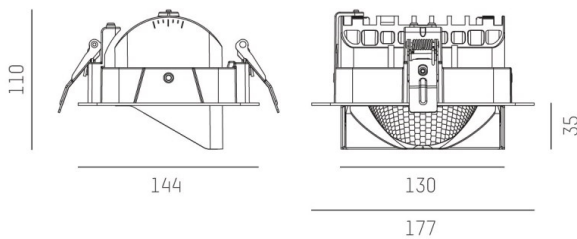

LIGHT DISTRIBUTION CURVE

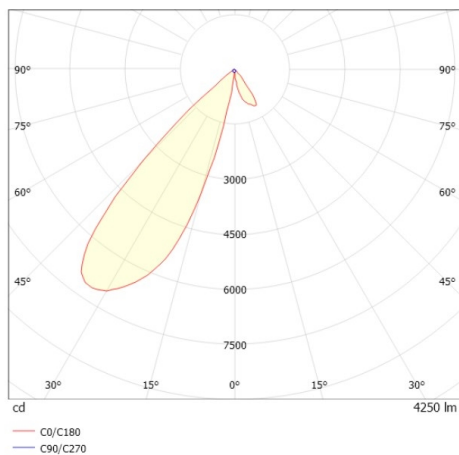

TECHNICAL DETAILS

| | |
|------------------------|--------------------------------------|
| Bulb type | LED 40W |
| Luminous flux [lm] | 4250 |
| Current sec. [mA] | 800 |
| Colour temp. [K] | 4000K |
| CRI | HE>90 |
| Optics | vacuum deposited synthetic reflector |
| Designer | INHOUSE |
| Converter | without converter |
| Dimming | see converter |
| Light output | direct |
| Beam angle [°] | asymmetrisch |
| Material | aluminium |
| Length [mm] | 176 |
| Width [mm] | 144 |
| Height [mm] | 110/35 |
| Ceiling cutout [mm] | 133x145 |
| Ceiling thickness [mm] | 1-25 |
| Recess depth [mm] | 100 |
| IP protection class | IP20 |
| Voltage class | protection cl. II |
| Net weight [kg] | 0,74 |
| Colour lamp | black |
| RAL | 9005 |
| EAN-Number | 9010870316959 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.